

DIGITAL VIDEO RECORDER

OPERATION MANUAL (REV.1.3)



⚠ WARNING Failure to follow these instructions could result in serious personal injury or death.

⚠ CAUTION Failure to follow these instructions could result in personal injury or property damage.

NOTICE Notifies user of references to use conveniently.

⚠ WARNING

- ☐ **Install this equipment avoiding a direct ray of light, heats and moistures.**
-Doing not, can result in lowering efficiency, electric shock or fire.
- ☐ **Do not pull electric wire or do not touch power plug with wet hands.**
-Can result in electric shock or fire.
- ☐ **Do not bend the power cable forcedly or do not press it with heavy materials.**
-Can result in electric shock or fire.
- ☐ **Do not use damaged power cord or loose outlet plug.**
-Can result in electric shock or fire.
- ☐ **Do not use the outlet fully.**
-Can result in electronic shock or fire.
- ☐ **Do not disassemble, repair or convert this product without permission.**
-Can result in electric shock or fire. When repair is required, contact the service center.
- ☐ **Do not open the cover of the product at your convenience or do not insert inductive stick into the ventilation hole.**
-Especially, SMPS is open, so only professional technicians are allowed to work on.

⚠ CAUTION

- ☐ **Do not place equipment on the inclined or uneven plane.**
-Can cause lowering of efficiency or malfunction.
- ☐ **Do not vibrate or shock in operation.**
-Can cause out of order with equipment and hard disk (HDD).
- ☐ **be caution that do not cover the ventilation hole of HDD or put liquid into the equipment.**
-may cause out of order of equipment and hard disk drive (HDD)
- ☐ **Battery Caution : “Risk of Explosion if Battery is replaced by an Incorrect Type. Dispose of Used Batteries According to the Instructions.”**

Open the box at the clean and even place. And read operation manual thoroughly before you install.



Remote Controller (option)



DVR Mainframe



USB Mouse (option)



DC Power Adapter



Power Cord Set



Software CD



Operation Manual

NOTICE

Check the items supplied with your DVR system. Refer to the picture above and contact your dealer if you find anything is missing or damaged.

The specification and appearance may be changed without prior notice.

Chapter I. System overview	
System Specification-----	7
System Characteristics-----	8
Chapter II. H/W description	
System Appearance-----	10
DVR Rear Panel-----	11,12
System Rear Connection detail-----	13
System Front Description-----	16
Remote Control Description-----	17
Installation Guide for HDD & ODD devices -----	18,19
System on / shutdown-----	20
Chapter III. Monitoring Screen	
Monitoring Screen-----	22
Screen split, login-----	23
Menu – Display-----	24
Menu – Spot, PTZ, Alarm-----	25
Menu – Status-----	26
Menu – Record, Camera, Color, OSD-----	27
Menu – Backup-----	28
Menu – Mute, Logout-----	29
Chapter IV. Setup	
System-----	31
System – Information-----	32
System – Date/Time-----	33
System – Disk-----	34
System – User-----	35
System – Log, Logout, Shutdown-----	36
Network-----	37
Network – LAN-----	38
Network – DDNS-----	39
Network – Email-----	40
Network – Callback-----	41
Device-----	42
Device – Camera-----	43
Device – Alarm / Main Monitor-----	44
Device– Display / Spot Monitor-----	45
Device – Miscellaneous-----	46
Record-----	47
Record – Record policy / Record-----	48
Event-----	49
Event – Motion-----	50
Event – Sensor-----	51
Event – Video loss-----	52
Event – System-----	53

Chapter V. Search

Search screen-----	55
Menu – Display / Calendar search-----	56
Menu – Event search / Date / Time search-----	57
Menu – First, Last, Bookmark-----	58
Menu – Local device / Backup device-----	59

Chapter VI. Client program

REMOTE -----	61
Connection Info / Button-----	62
Program Info & Setup-----	63
Icon Adjustment-----	64
Remote search execute & setup-----	65
Menu – Remote setup (Camera)-----	66
Menu – Remote setup (Alarm)-----	67
Menu – Remote setup (Record)-----	68
Menu – Remote setup (Record table)-----	69
Menu – Remote setup (Record policy)-----	70
Menu – Remote setup (Motion)-----	71
Menu – Remote setup (Motion link)-----	72
Menu – Remote setup (Sensor)-----	73
Menu – Remote setup (Sensor link)-----	74
Menu – Remote setup (Video loss)-----	75
Menu – Remote setup (Video loss link)-----	76
Menu – Remote setup (System)-----	77
Menu – Remote setup (Disk error/S.M.A.R.T)-----	78
Menu – Remote setup (Disk error/S.M.A.R.T link)-----	79
Play & Pause / Audio transmission / Mouse click to right-----	80
Channel button/Layout change button-----	81
PTZ operation-----	82
Remote search (Image playback screen / Section)-----	83
Remote search (Hotkey & Event search)-----	84
Remote search (Connection info / button / playback button)-----	85
Remote search (Split screen change / Audio / Image control button)-----	86
Remote search (Saving related button)-----	87
Remote search (Preview)-----	88
Remote search (Mouse click to right)-----	89
Remote search (Time table)-----	90
Backup playback-----	91
PLAYER -----	92

Chapter VII. APPENDIX

Front Key-----	96
Hot Key-----	97
Product Warranty-----	98

Chapter-I. System Overview

System Specification

		XQ-LITE 400	XQ-LITE 900	XQ-LITE 1600
Video IN / Loop Out		4	9	16
Video Display		1, 4	1, 4, 9	1, 4, 9, 16
Monitor Out		1ch Composition		
VGA Out		1ch		
Spot Out		1ch		
Audio In/Out		4 in / 1 out		
Audio Compression		G.723		
Display Resolution		720x480		
Recording Resolution		720x480, 720x240, 360x240		
Video Compression		Mpeg4 Level 1,2,3		
Display Frame	NTSC	120fps	270fps	480fps
	PAL	100fps	225fps	400fps
Record Frame	NTSC	D1 120fps	CIF 240fps	CIF 240fps
	PAL	D1 100fps	CIF 200fps	CIF 200fps
Playback Frame	NTSC	D1 120fps	CIF 240fps	CIF 240fps
	PAL	D1 100fps	CIF 200fps	CIF 200fps
OS		Embedded Linux		
Network		10/100 BaseT(1EA)		
USB		USB2.0 (Front 1EA, Rear 1EA)		
EIDE		2ch (Max 3EA HDD)		
SATA		4Ch (Max 3EA HDD)		
Console		RS232C		
PTZ		RS485		
Alarm Function (In/Out)		4/1		
Front Key		33 Key		
Remote controller		ID Remote controller		
Watchdog / Power monitor		Yes		
LCD		None		
Front LED		Power, Network, HDD		
Dimension		395(W)x 390(D)x 70(H)mm		
Operation temp.		0~45℃		
Operation humidity		5~70%		
Weight		3.5kg (Without CDRW, HDD)		
Power		Adapter DC 12V, 50/60Hz, 5A	Adapter DC 12V, 50/60Hz, 7A	

System Characteristics


- D1(720*480) real-time recording at 4CH (Only XQ-LITE 400)
- High level specification with elegance design and jog/shuttle, easy UI with LCD
- Control recording resolution, quality, frame rate by each camera
- USB mouse supported
- LIVE screen editing, Digital zoom, SPOT monitor supported
- Event / Panic / Schedule record, optimized record mode supported
- Diversified search by Time, Calendar, Event supported
- Diversified backup by USB2.0 and DVD-RW supported
- Convenient backup by AVI , Mini viewer etc
- 10/100 Base-T network
- DDNS, NTP, E-MAIL, CALLBACK functions
- DISK ID, S.M.A.R.T functions, real-time disk health check
- Multi-language supported
- Intensive security function by chosen AUTHORITY
- Diversified network program by LIVE, SEARCH, CMS, AGENT




Chapter-II. H/W Description

System appearance


1) Front View

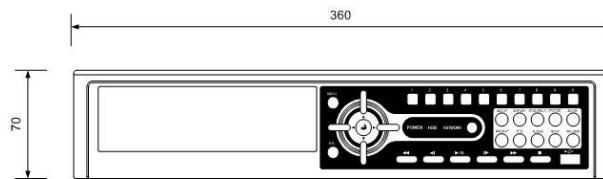

2) Side View

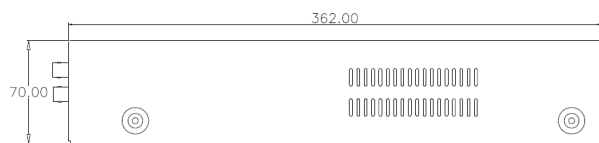


3) Top View

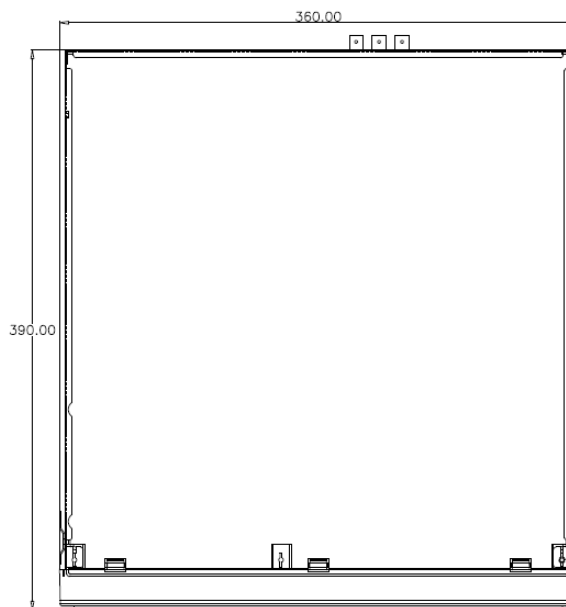


DVR rear panel

1) 4CH Rear Panel

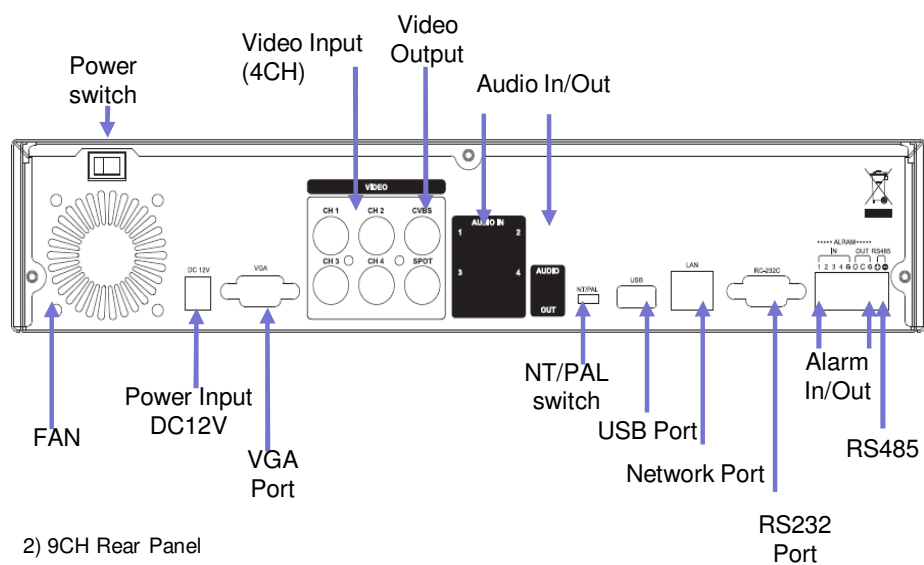


2) 9CH Rear Panel

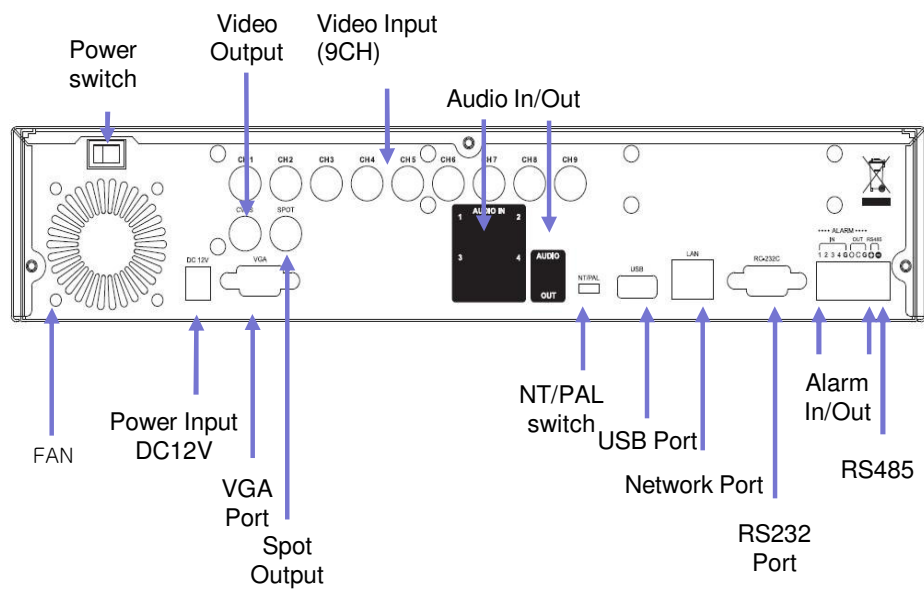


DVR rear panel

3) 16CH Rear Panel

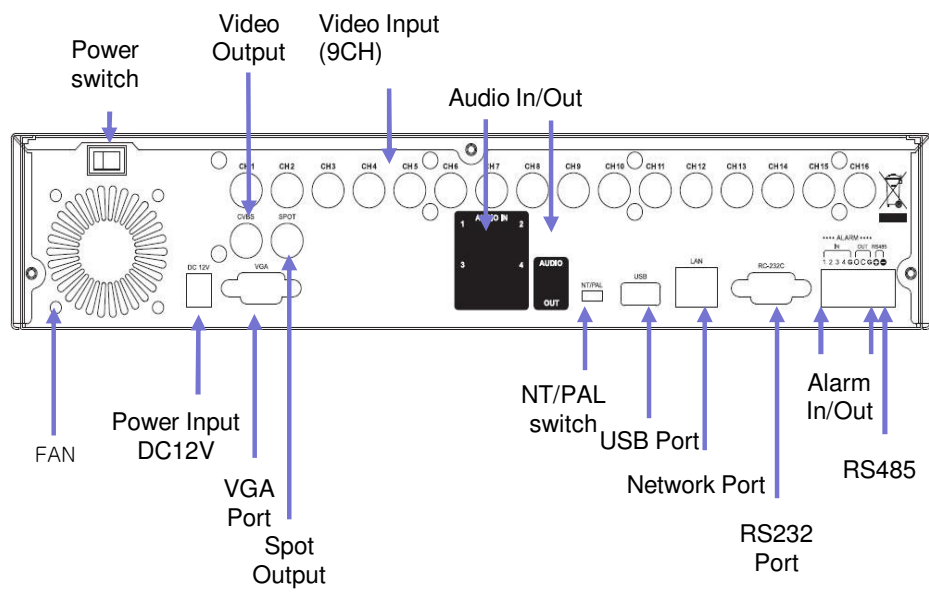


System rear connection detail

1) Video Source Connection



It connects video sources (camera image) to BNC connector via cable.


2) Monitor Connection



CVBS/ SPOT OUT : It connects normal CCTV CRT monitor.


VGA : It connects PC monitor or LCD monitor (not supporting DVI)

3) Audio Connection




It connects audio source (mic) to audio input (4CH) of RCA and connects speaker to audio output.

4) Network Connection




It supports 10/100 BaseT, connects Cat5 cable with RJ-45

5) RS232 port Connection.




RS232 port is connected to PC and other devices for specific function and After Sales purpose.

6) USB port Connection



It consists of 1 USB (Front), 1 USB (Rear), its supported devices are such as USB mouse, USB external HDD and USB memory stick

7) ALARM IN/OUT(SENSOR) Connection



* Alarm Input 1~4CH

When an event happens DVR operates by using external device.
Sensor, Switch signal (Signal GND) are connected terminal block.
Ref : Spec. Max 6V/50mA

* Alarm Output 1CH

It can be on/off external device as buzzer, headlamp etc.
Alarm input mode consists of NORMAL OPEN and NORMAL CLOSE.
Ref : Spec. Max24V/2A

* RS485


Through Half-duplex serial communication, remote controlling is available using control system as external device, control keyboard.
In addition, it is available to control PTZ (Pan/Tilt/Zoom) camera.
it is connected RS485 +,- of DVR.

8) NTSC/PAL Shift Switch




The factory reset switch located at the left side of NTSC/PAL switch is used to return to factory default setup values.
When you need to shift NTSC/PAL mode, turn off the DVR before shift switch, then restart the DVR.

9) Power Connection







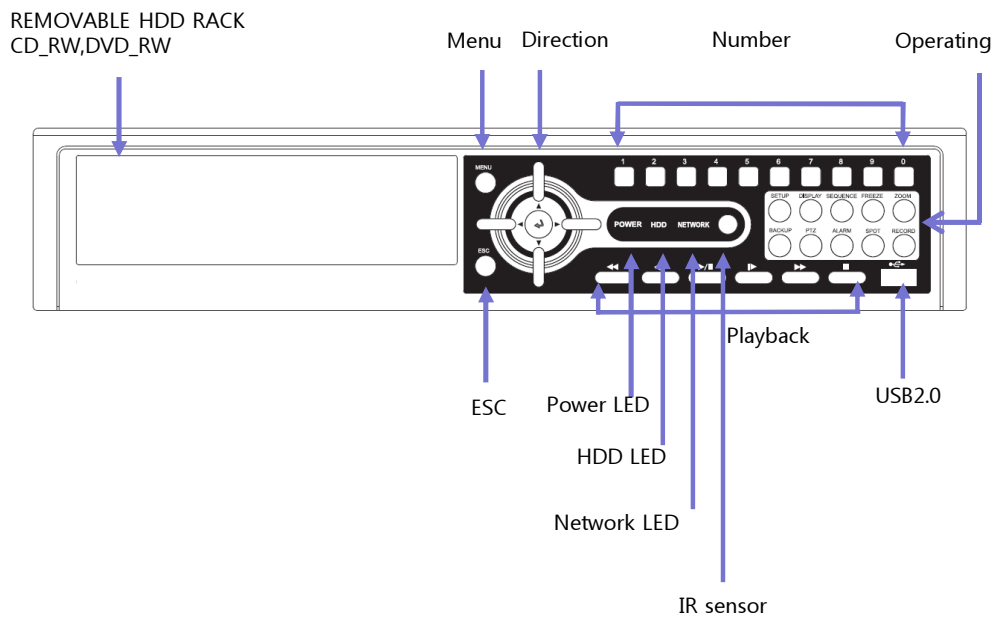















Adaptor is DC12V /5A input and Main Power can turn on/off DVR on Switch.

System Front Description



- **Menu Button** : it shows menu in live, search display (same function as right click of mouse)
- **Direction Button** : It is used for movement, changing set-up, PTZ move, etc in menu.
(Basic function- left, right : Movement / up, down : Changing set-up / Enter : confirmation)
- **Number Button** : It is used for Changing to 1CH screen, direct input in set-up.
- **Operating Button** : It is used for operating function as Setup, Backup etc in DVR.
- **ESC Button** : It is used for exit from menu/mode, withdrawing from execution.
- **LED** : It shows status of Power, HDD, Network.
- **IR sensor** : it receives a signal of remote controller (remote controller is optional)
- **Playback Button** : It is used for when search, playback, Pause, FF, REW.
(It comes to live screen out of playback screen when stop button is pressed)

Remote controller Description (Optional)

ICON	FUNCTION	HOT KEY
	POWER ON/OFF	
	PLAYBACK & PAUSE	LATEST SEARCH
	STOP	TO LIVE
	REWIND	FIRST SEARCH
	FAST FORWARD	LAST SEARCH
	STEP REVERSE	CALENDAR SEARCH
	STEP FORWARD	EVENT SEARCH
	DISPLAY	
	SEQUENCE	
	FREEZE	
	ZOOM	
	SETUP	
	BACKUP	
	COLOR	
	STATUS	
	ENTER	
	DIRECTION	
	MENU	
	ESCAPE	
	RECORD	




○ How to change remote controller ID

- A) Enter 'ID' button for 3seconds
- B) Power LED is lightened.
- C) Enter 2 letters of digit. (00 ~ 99) – In case 00, means no ID function
- ID set is available from 01 to 99.
- D) Save setting value, then LED is off.
- E) It enables to communicate the same ID DVR
- F) LED is ON every time data is transferred.

Installation Guide for HDD & ODD devices (E-IDE Type)

Description

1. ODD(CD-RW/DVD-RW) devices should be installed as "Secondary Slave".
2. HDD for system needs to be installed as "Primary".

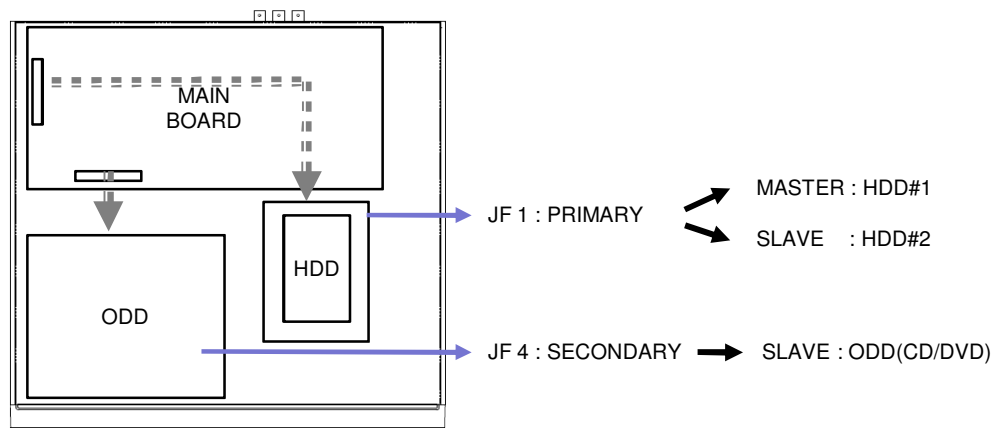


Guide Chart for installing several HDDs

Installed	HDD	HDD		System	ODD(CD-RW/DVD-RW) Device	
		IDE	Connector		IDE	Connector
HDD x 1	HDD#1	PRIMARY MASTER	JF1	SYSTEM	SECONDARY SLAVE	JF 4
HDD x 2	HDD#1	PRIMARY MASTER	JF 1	SYSTEM		
	HDD#2	PRIMARY SLAVE	JF 1			

Installation Guide for HDD & ODD devices (SATA Type)

Description

1. ODD(CD-RW/DVD-RW) devices should be installed as "SATA 4".
2. HDD for system needs to be installed as "SATA 1".

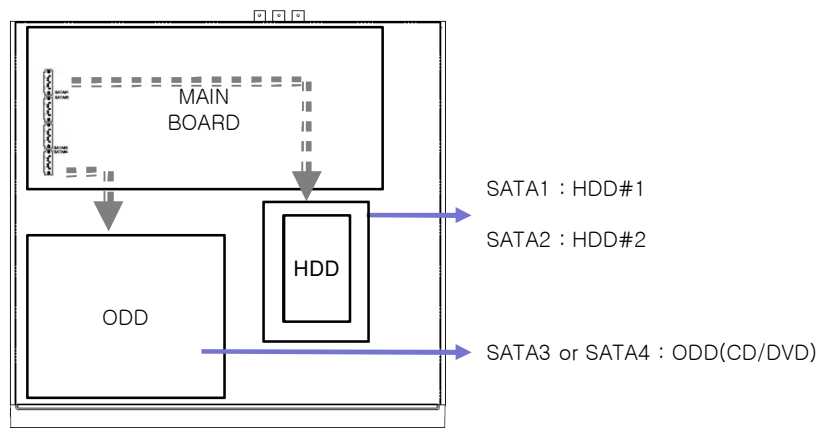

Guide Chart for installing several HDDs

Installed	HDD	HDD Position	System	ODD(CD-RW/DVD-RW) Device
HDD x 1	HDD#1	SATA 1	SYSTEM	SATA 4
HDD x 2	HDD#1	SATA 1	SYSTEM	
	HDD#2	SATA 2		

System On

- Put the power to the DVR.
- Turn on the power switch at the rear power button .
- It takes about 2minutes to boot (It may take more when network cable isn't connected)

System Shutdown

- Select [SETUP > SYSTEM > SYSTEM SHUTDOWN] to shutdown system at login status
- Press "OK" button to confirm "Power off the system", then turn off power switch in the rear.



Chapter-III. Monitoring Screen

Monitoring Screen



- ① **Monitoring screen** : it monitors each channel.

<Screen Indication>

Left Up : Camera Name
P – Pan/tilt
A – Audio


Right Up : Record mode (Blue-Normal, Red-Event)
Motion status

Central : Video Loss, Hidden Camera

- ② **Status Bar** : DVR status Indication
(Backup, HDD usage, Current Time, SEQUENCE, FREEZE, Login info. etc)

Screen Split

Press DISPLAY button or mouse menu: changed on 1 →4 by turn

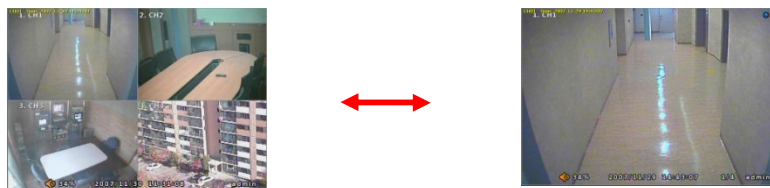

Direct Channel


- 1) Press channel No. on the remote control or front panel.
- 2) Click the screen to watch specific channel using mouse.

LOG IN

Login to menu for setup


Default: ID – **admin**

PASSWORD - **1**

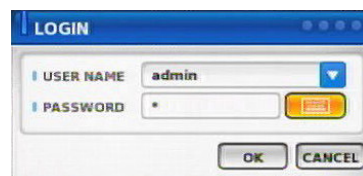

It is recommended to change ID and PW for your safety.

CAMERA ALLOCATION function (changing camera display position)

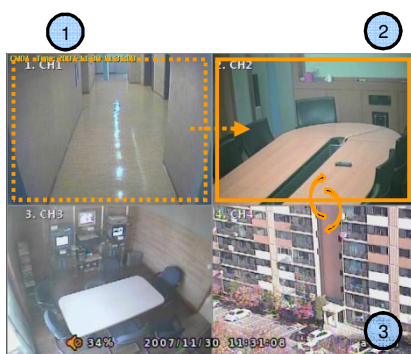

1) Making show up Menu by clicking mouse right button or pressing menu key of remote controller in monitoring status, then ETC → select group EDIT.

2) When box of orange color shows up on No.1 CH, by using key of up/down/left/right, move to desired channel to switch.

3) Enter channel no. you wish to switch.

4) To exit, press ESC or Enter

Ex) Switching camera No 2 and 4.

Menu Bar * Click MENU button or right button of mouse



DISPLAY

1, 4

: Split screen change (the same as DISPLAY button)

MISCELLANUEOUS

SEQUENCE

Sequence camera group regularly

FREEZE

Pause the screen

ZOOM

1 Full Live screen available only.

Select Zoom : Press zoom button and locate the box to magnify using direction keys

Move Zoom : It can be moved using direction key after press Enter.



<ZOOM selected screen>




<ZOOM screen>

NOTICE

Zoom screen may provide low quality or be shaken as formatted digitally.

SPOT


1 spot monitors are supported and sequence / fix mode can be selected.
Select the Spot monitor in SETUP>DEVICE>SPOT MONITOR.

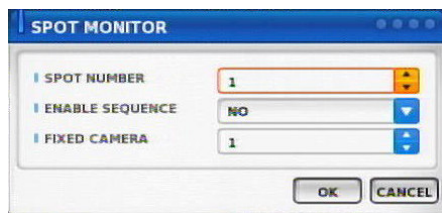**PTZ**

Pan Tilt/Zoom/Focus/Iris Preset setting and moving functions are supported.
Each function can be different from each PTZ protocol.


**ALARM**

Control Alarm output function.

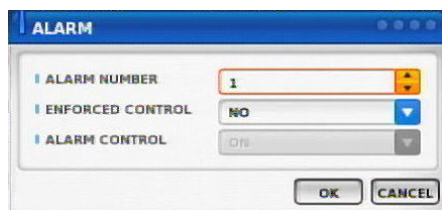

STATUS**RECORD**

Displays current recording status

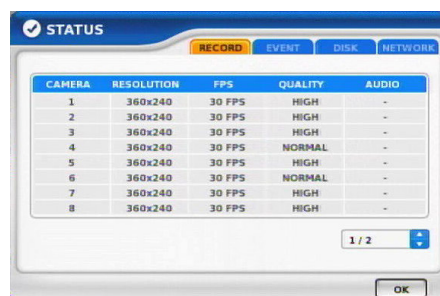


The STATUS window has a blue header bar with a checkmark icon and the word 'STATUS'. Below the header are four tabs: RECORD (highlighted in orange), EVENT, DISK, and NETWORK. The main area contains a table with 5 columns: CAMERA, RESOLUTION, FPS, QUALITY, and AUDIO. The table has 8 rows of data. At the bottom right, there is a '1 / 2' indicator and an 'OK' button.

CAMERA	RESOLUTION	FPS	QUALITY	AUDIO
1	360x240	30 FPS	HIGH	-
2	360x240	30 FPS	HIGH	-
3	360x240	30 FPS	HIGH	-
4	360x240	30 FPS	NORMAL	-
5	360x240	30 FPS	HIGH	-
6	360x240	30 FPS	NORMAL	-
7	360x240	30 FPS	HIGH	-
8	360x240	30 FPS	HIGH	-

EVENT

Displays current event information (motion/alarm).

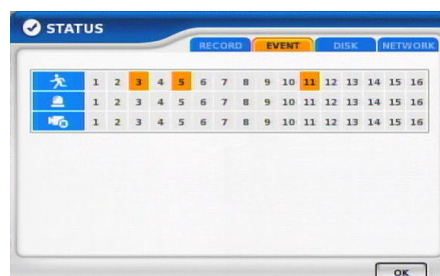


The STATUS window has a blue header bar with a checkmark icon and the word 'STATUS'. Below the header are four tabs: RECORD, EVENT (highlighted in orange), DISK, and NETWORK. The main area contains a table with 16 columns, numbered 1 to 16. The first three columns have icons: a person for column 1, a camera for column 2, and a speech bubble for column 3. The rest of the columns are empty. At the bottom right, there is an 'OK' button.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

DISK

Displays current Disk information

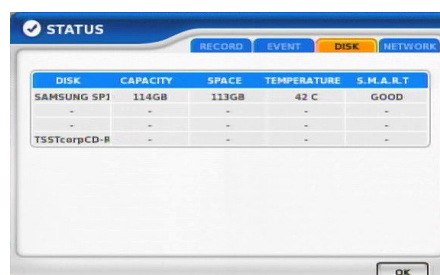


The STATUS window has a blue header bar with a checkmark icon and the word 'STATUS'. Below the header are four tabs: RECORD, EVENT, DISK (highlighted in orange), and NETWORK. The main area contains a table with 5 columns: DISK, CAPACITY, SPACE, TEMPERATURE, and S.M.A.R.T. The table has 3 rows of data. At the bottom right, there is an 'OK' button.

DISK	CAPACITY	SPACE	TEMPERATURE	S.M.A.R.T.
SAMSUNG SP1	114GB	113GB	42 C	GOOD
-	-	-	-	-
TSSTcorpCD-R	-	-	-	-

NETWORK

Displays current network information.
Also displays current connected client information.

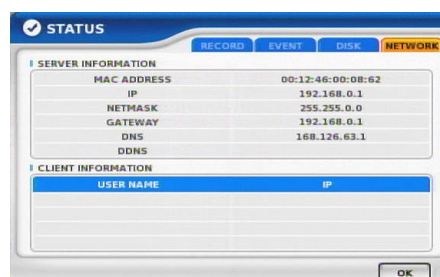

The STATUS window has a blue header bar with a checkmark icon and the word 'STATUS'. Below the header are four tabs: RECORD, EVENT, DISK, and NETWORK (highlighted in orange). The main area contains two sections: 'SERVER INFORMATION' and 'CLIENT INFORMATION'. The 'SERVER INFORMATION' section has a table with 2 columns: the first column lists network parameters (MAC ADDRESS, IP, NETMASK, GATEWAY, DNS, DDNS) and the second column lists their values. The 'CLIENT INFORMATION' section has a table with 2 columns: USER NAME and IP. At the bottom right, there is an 'OK' button.

SERVER INFORMATION	
MAC ADDRESS	00:12:46:00:08:62
IP	192.168.0.1
NETMASK	255.255.0.0
GATEWAY	192.168.0.1
DNS	168.126.63.1
DDNS	

CLIENT INFORMATION	
USER NAME	IP

PANIC RECORD

Set recording mode in an emergency situation.

Press SETUP>RECORD> EVENT RECORD>FPS/QUALITY

SETUP


Select to enter into SETUP menu

CAMERA COLOR

Changes camera screen color

**OSD**

Changes OSD (On Screen Display)'s position.

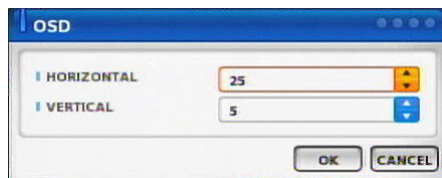**SEARCH**

Select to enter into SEARCH menu


BACKUP

Select to backup recorded data.

1) Backup Device Search




4) Warning when data size is over

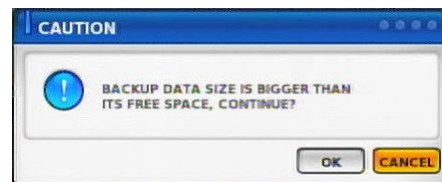

2) Select data to backup




5) Make Image after pressing OK.

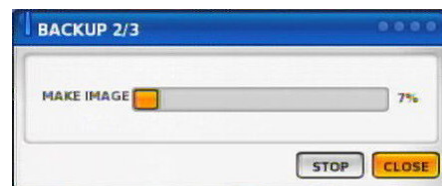

3) Calculate data size



6) Burning to CD

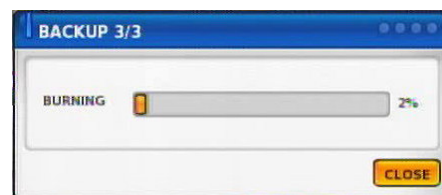


MUTE

Sound off

LOGOUT

Press SETUP>SYSTEM>USER

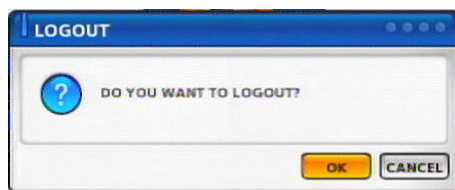

Chapter-IV. SETUP

SETUP SCREEN**SYSTEM**

Set up various system related items.

INFORMATION

DATE/TIME

DISK

USER

LOG

LOGOUT

SYSTEM SHUTDOWN


INFORMATION**INFORMATION**

DEVICE NAME: User can change the DVR name on his own.

LANGUAGE : Select language.

VERSION : Shows S/W version info.

(With UPGRADE button, you can upgrade the newest S/W version)

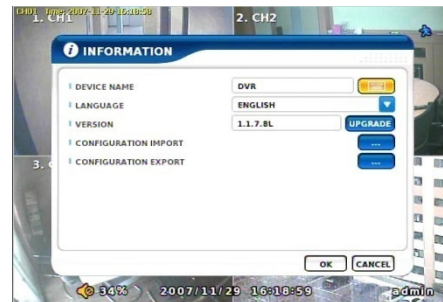**NOTICE**

Contact manufacturer or distributors for more Upgraded version .

CONFIGURATION IMPORT : You can read setup values saved in USB or Initialize the setup values

CONFIGURATION EXPORT : You can record setup values in USB equipment.

DATE/TIME**DATE/TIME**

Set date, time & Time zone of System.

⚠ CAUTION

When you use it for the first time
Set these items in advance .


Check “NO” of enable in the TIME SYNC
menu, user can change DATE/TIME

**TIME SYN**

Synchronize time with internet time server.

⚠ CAUTION

Set the GMT on the DATE/TIME list and
Adjust TIME SYNC.

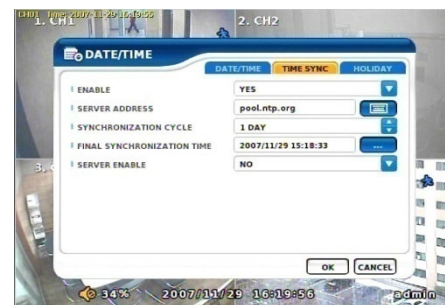**HOLIDAY**

In the schedule record setup , it automatically
converts normal date to holiday schedule.

It works when record is setup as schedule mode.



DISK

DISK TABLE

Shows current disk information connected to system.

IMPORTED : DISK installed

RECORD : RECORD possible

SYSTEM : DISK allotted for SYSTEM

TOTAL DISK FORMAT

Format all connected HDD disks.

(When you select info column of connected DISK separately,
You can format DISK one by one.




CAUTION


One of DISKS should be a system disk for recording system logs & other TEMP file issuing purposes.

CAUTION

Backup devices such as CD-RW/DVD-RW need to be installed as Secondary Slave.
(JF 4 Connector. – Slave jumper setting)

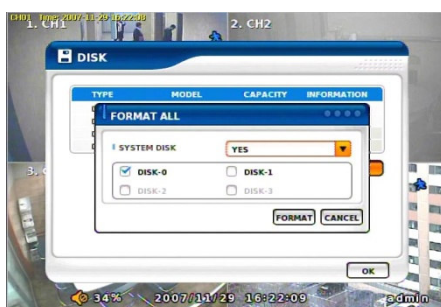

<SYSTEM DISK selected Screen>

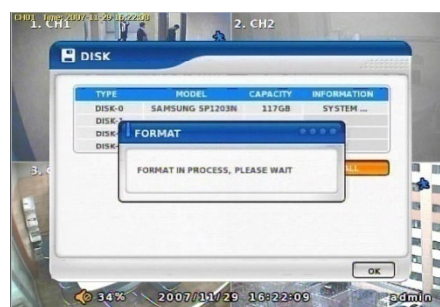

<On FORMAT Screen>

USER**USER**

Shows currently registered user lists.
User accounts can be added or deleted.

+ add account with this button.

X Delete account with this button.

**USER ADD**

Possible to add user account
according to authority.

**CONFIRM LOGIN**

When YES selected, LOGIN needs to be confirmed every time to enter into setup / system menu.

AUTO LOGOUT ENABLE

LOGOUT automatically after a certain period of time.

AUTO LOGOUT TIME

Set idle time to LOGOUT

LOG**LOG**

Shows all log infos on SYSTEM and other events

CLEAR : Remove all log info.

UP/DOWN button : Move to next/previous log info page by page .

⏮ Move to first part of LOG info.

⏭ Move to Last part of LOG info.

**LOGOUT**

LOGOUT function when exiting set up

SYSTEM SHUTDOWN

SYSTEM ends.

The same as POWER OFF button of front or remote control.

NETWORK**NETWORK**

Set up various NETWORK items

- LAN
- DDNS
- E-MAIL
- CALLBACK

LAN**MAX CONNECTION**

Shows maximum numbers of
Connectable users.
(Up to 4)

STATIC TYPE

Select in case of STATIC IP.
All setting values of IP, GATEWAY, NETMASK
Need to be set manually.

**DHCP TYPE**

Select during automatic DHCP IP.
User set DNS only.
(under the situation of DHCP server operating mode)

**ADSL TYPE**

In case USER ID, P/W are needed to input
such as PPPoE of ADSL line



DDNS(DYNAMIC DNS)**ENABLE**

Select if you want DDNS

This is under the situation of Dynamic IP Network.

SERVER

Select DDNS server

EZDDNS : Specialized DDNS server operated by Manufacturer

→ www.ezddns.com

DYNDNS: DDNS common server

**NOTICE**

In order to use DDNS service
Account & HOSTNAME should be registered in the server first.

HOSTNAME

User name of IP ADDRESS ON Dynamic IP circumstance.
It is the same name as registered on DDNS server.

USERNAME / PASSWORD

Type the user name & pas word registered on DDNS service.

ROUTER


Check if NETWORK is through ROUTER or IP sharer .

CAUTION

Recommended to use EZDDNS Server rather than DYNDNS as DYNDNS is not optimized
The system.

E-MAIL**ENABLE**

Select when you need E-MAIL transmission.
ALL event information is sent to admin's E-mails.

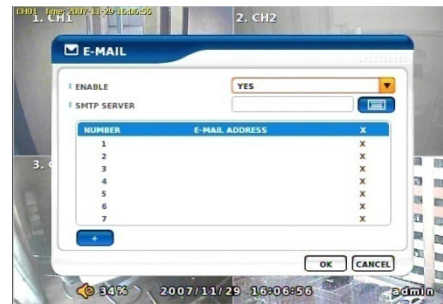**SMTP SERVER**

Write the MAIL sending SMTP server name.

SENDER


Write the mail account of sender.

AUTH ENABLE

Check when you need account authority.

ID / PASSWORD


Input account & password .

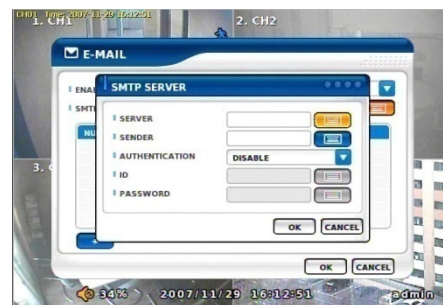


CALLBACK**ENABLE**

Check to use CALLBACK function .

All event or specific information are sent to “Agent” Program which is installed on P.C

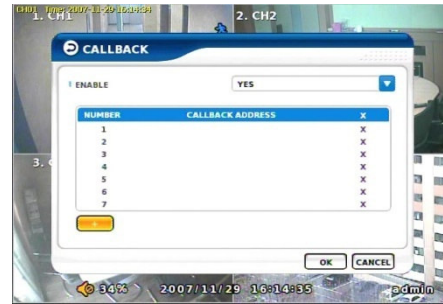**CALLBACK ADD**

Register IP address of P.C for callback function

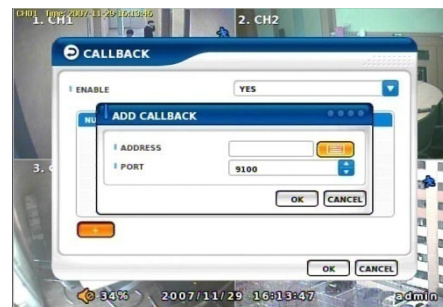

DEVICE**DEVICE**

These are item lists for the control of CAMERA, ALARM .

CAMERA

ALARM

DISPLAY

MAIN MONITOR

SPOT MONITOR

MISCELLANEOUS

CAMERA

ENABLE

Check if you want to use current camera

TITLE

Can change the camera name.

HIDDEN

Doesn't show the screen on live mode
Even though it records and runs normally.



PTZ ENABLE

Check if you want to use PTZ function.

PTZ PROTOCOL

Select PTZ PROTOCOL.

Various of protocol information including
PELCO-D are implemented.

If you can not find one, please contact manufacturer



PTZ ADDRESS

When you use many of same PTZ equipments

You can name on these PTZ sites.

Site numbers can be from 0 to 255.

PTZ PORT

Adjustable related protocol BAUDRATE, DATA BIT.

ALARM**ENABLE**


Check if you use specific ALARM.

TITLE

Changes connected ALARM names.

ALARM TYPE

Select specific ALARM TYPE.
(NORMAL OPEN, NORMAL CLOSE)

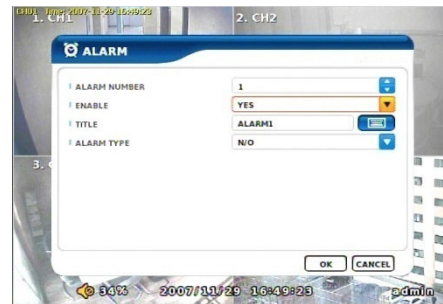**MAIN MONITOR**

Set up SEQUENCE, EVENT POPUP
of main monitor.

SEQUENCE

Set up the screen switching times.

EVENT POPUP

Check if you want event pop up function.



DISPLAY

Shows all OSD display details.

CAMERA INFORMATION

Selects the display of CAMERA NO, TITLE

EVENT INFORMATION

Select OSD display for the EVENT.

STATUS INFORMATION

Shows various status of OSD.

**SPOT MONITOR**

Set up functions of SPOT MONITOR.

SPOT NUMBER

Select SPOT output numbers.

SPOT SEQUENCE ENABLE

Select SPOT switching channel.

FIXED CAMERA

Select the camera number not to switch .

SEQUENCE CAMERA

Select which camera to switch.

SEQUENCE DWELL

Adjust switching times .



MISCELLANEOUS

Control of remote controller/key related functions.


REMOTE CONTROLLER ID

Designate remote control ID.

It is useful when many DVRs installed at the same place .

KEY TONE ENABLE

Select button volume on the front panel.

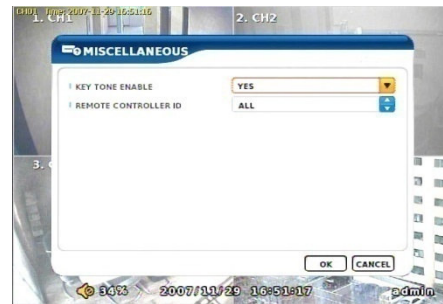

RECORD**RECORD**

These are control lists of recording related functions.


RECORD POLICY

RECORD

RECORD POLICY

Select RECORD types.

- Two types (Single Record, Overwrite)

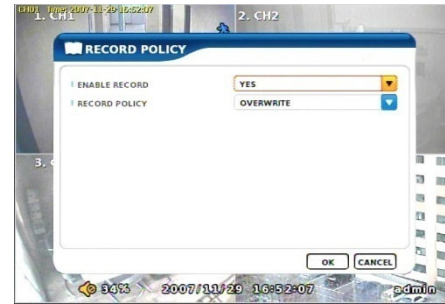**RECORD**

Set up specific record type per each camera.

RESOLUTION

Set up resolution.

- 360*240(CIF)
- 720*240(HALF-D1)
- 720*480(D1)

RECORD MODE

Set up record type.

NORMAL+EVENT is focused record mode.

**NORMAL/EVENT RECORD FPS**


Set up how many frames to record.

NORMAL/EVENT RECORD QUALITY

Set up record quality.

SCHEDULE

Set each week's schedule.

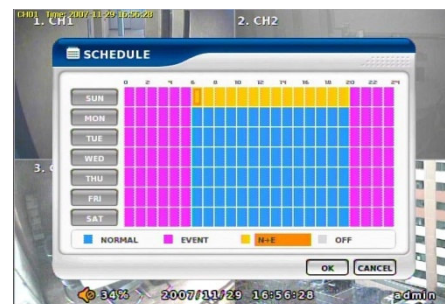

EVENT**EVENT**

This is for the control of all event items such as MOTION, SENSOR.

MOTION
SENSOR
VIDEO LOSS
SYSTEM

MOTION**SETUP**

Set up the MOTION area & sensor.

Click mouse right or MENU KEY button to see motion area window

**RECORD**

Set pre & post record mode.


CAUTION

When record frames are less, PRE/POST RECORD need to be set a lot more for correct record search.

**ACTION**

Setting up list for how to act after EVENT.

- **POPUP CAMERA/DWELL**
:Set popup channel & time.
- **ALARM/BUZZER DWELL**
:Set alarm & buzzer time.
- **E-MAIL**
:Select EVENT info to be sent by e-mail.
- **CALLBACK**
:Select EVENT info to be sent to AGENT.
- **WRITE LOG**
:Select to write LOG info.

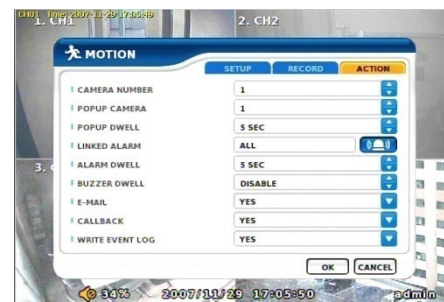

SENSOR

SETUP

Set the SENSOR name & TYPE.

NORMAL OPEN : Normally it opens and sends signals when detects sensors.

NORMAL CLOSE : Normally it closes, and it sends SIGNAL when detects sensors.



RECORD

Set Connecting camera, Pre, post record.

CAUTION

When record frames are less, PRE/POST RECORD need to be set a lot more for correct record search.



ACTION

Setting up list for how to act after EVENT.

- POPUP CAMERA/DWELL

:Set popup channel & time.

- ALARM/BUZZER DWELL

:Set alarm & buzzer time.

- E-MAIL


:Select EVENT info to be sent by e-mail.

- CALLBACK

:Select EVENT info to be sent to AGENT.

- WRITE LOG

:Select to write LOG info.

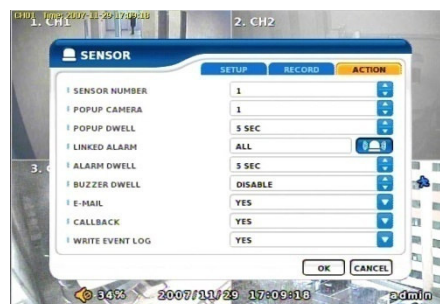


VIDEO LOSS

VIDEO LOSS can be an event type and can set camera record and action.

SETUP

Select whether you want VIDEO LOSS Function or not.

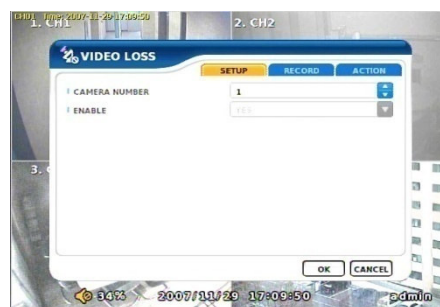

RECORD

Set connecting camera Pre& post record.

⚠ CAUTION

When record frames are less, PRE/POST RECORD need to be set a lot more for correct record search.



ACTION

Setting up list for how to act after EVENT.

- **POPUP CAMERA/DWELL**
:Set popup channel & time.
- **ALARM/BUZZER DWELL**
:Set alarm & buzzer time.
- **E-MAIL**
:Select EVENT info to be sent by e-mail.
- **CALLBACK**
:Select EVENT info to be sent to AGENT.
- **WRITE LOG**
:Select to write LOG info.




SYSTEM

Sets how to operate event related with DISK mainly.


DISK FULL

Sets when HDD is full of record.

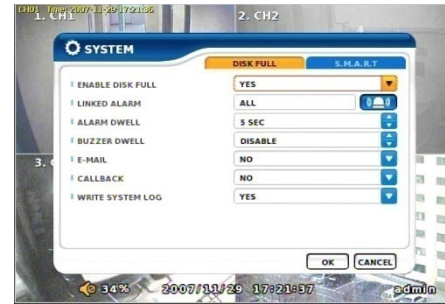

S.M.A.R.T


Enables the system to prevent possible malfunction of HDD by interfacing between system and HDD.

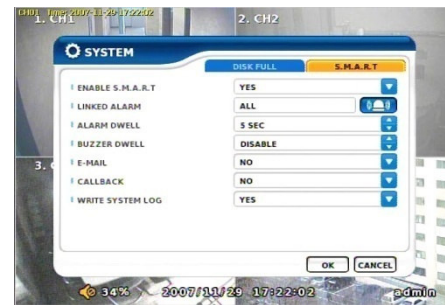

If you found "BAD HDD" mark in the S.M.A.R.T function, please exchange HDD as soon as possible

Chapter-V. SEARCH

SEARCH

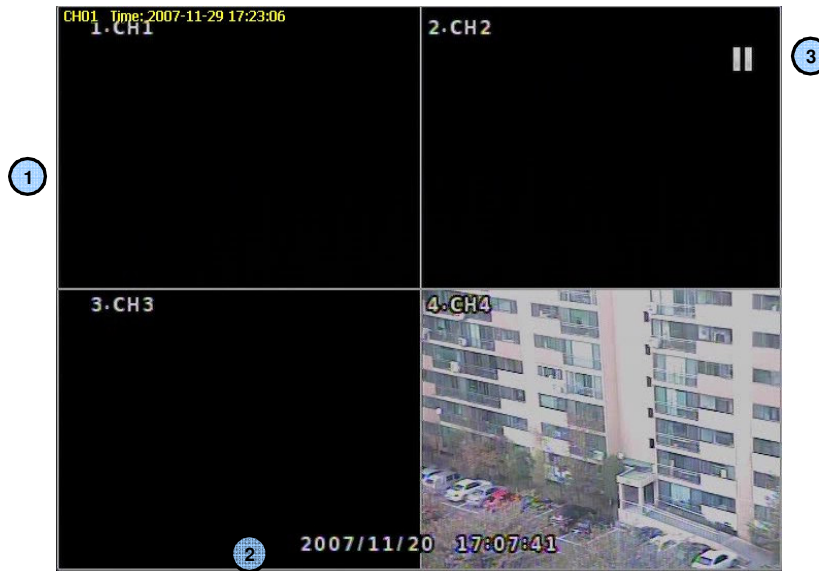

- ① Playback Screen : Record Playback
- ② Playback Time : Playback Time Display
- ③ Display Status

Playback Icon

Pause (II)


Playback (▶)

Multiple Playback(▶ ▶, ▶ ▶ ▶, ▶ ▶ ▶ ▶)

NOTICE

It randomly shows the first searched record file when it goes to SEARCH MODE.
This type is the same as on event search , so it is possibly not to shows
The exact record file searched .

SEARCH MENU

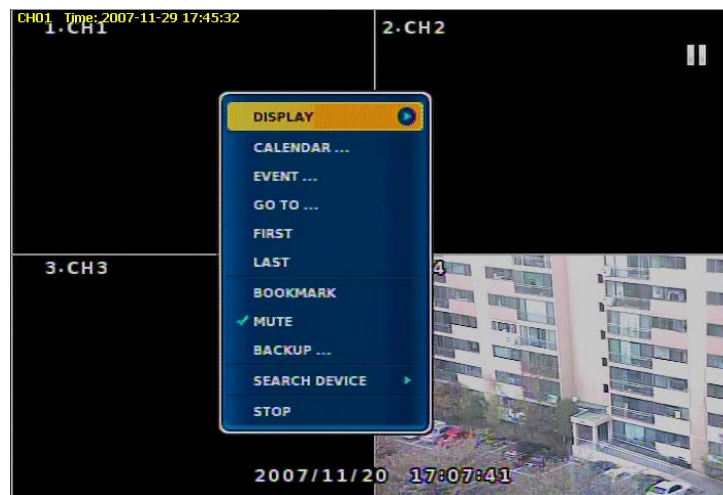


DISPLAY

Select screen division mode. (1,4 spirit)

CALENDAR SEARCH


Select date, hour, minutes, seconds in turn on calendar search.

When you click MINUTE, you can find specific record status as right below.

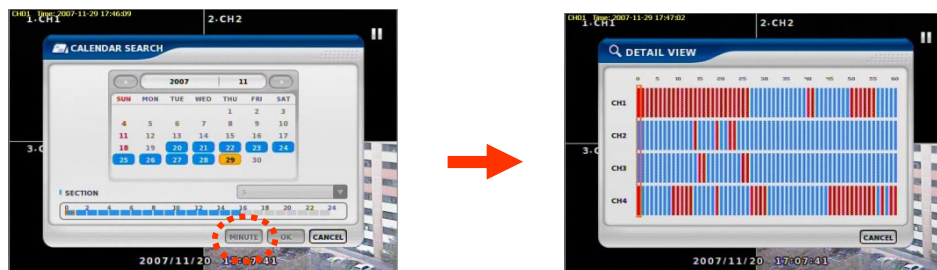

NOTICE

Section is
Generated and maintained recording data that
occurs duplicating data returning previous time by
any cause during DVR operating

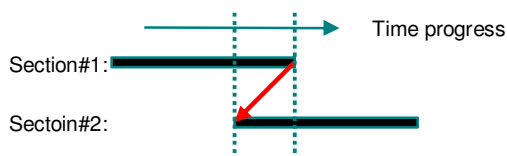**EVENT SEARCH**

It shows all EVENT record list.
If you click related EVENT,
It plays that event promptly.

CAUTION

It may not be the same channel image as
shown on EVENT LIST because it shows the
first display image recorded at that time zone.

**SEARCH KEY**


Can be selectable on EVENT search.

-START/END

:Set EVENT search start, end time.

-MOTION/SENSOR/VIDEO LOSS

:Selectable per each camera

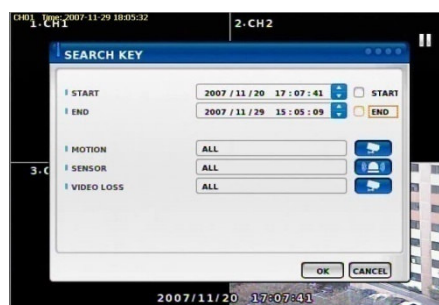

DATE/TIME SEARCH

Search data by Date/Time .

You can search the event promptly

When you know the exact event time.

**FIRST**

Move to first part of recorded DATA.

LAST

Move to last part of recorded DATA.


BOOKMARK

Sets automatically starting time during back up.

It is useful to set a bookmark as starting time while search the data.

**PLAYBACK USER INTERFACE**

Playback buttons appears when locate the mouse pointer at the bottom of screen

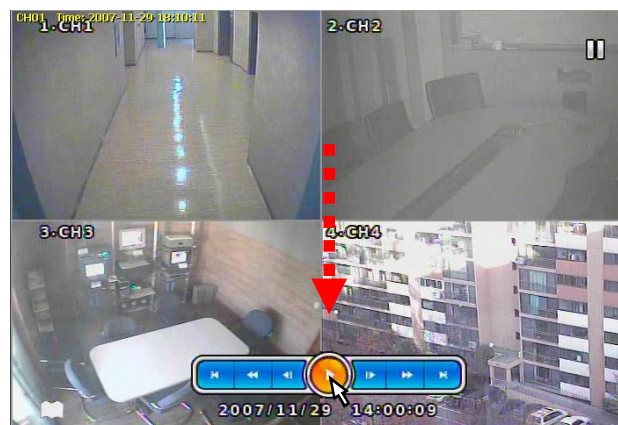

DEVICE


Search internal or external
SYSTEM DISK .

LOCAL DEVICE

Search the data of internal DISK.

**BACKUP DEVICE**

Search backup device (Select when you play the backup data.)
If there are various back up devices , you can select a specific one .

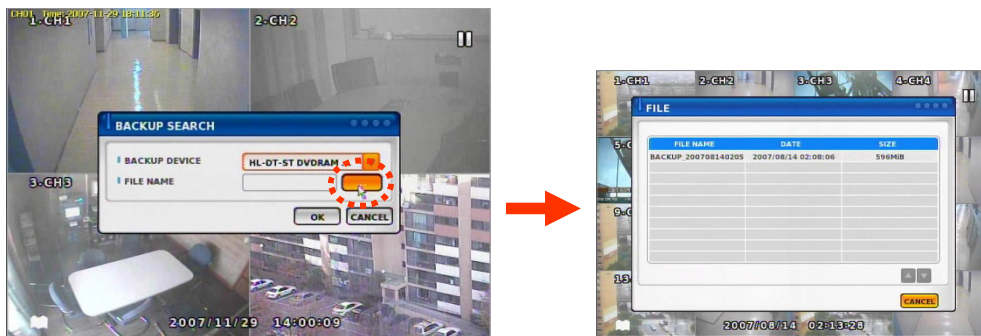

Chapter-VI. Client program

REMOTE



<REMOTE PROGRAM IS?>

With connected to DVR remotely, it is to perform Remote Monitoring, Remote Search, Remote Backup etc. (Please install remote program from the program CD)

Environment conditions for Remote Program

1. INTEL P-4
2. 256M or higher main memory(512M recommend)
3. WINDOWS O/S(WIN 2000, XP, Vista(32bit))
4. 32MB VGA card supports RGB (ATI series recommend)
5. At least 10Mbps network speed (Max 100Mbps support)


Please note that some buttons and graphics may not be activated at this moment. Those inactivated buttons will be used later when system upgrades and expands

1 Connection information and Button



Shows DVR's name, IP address and connection status.

DVR connection button.

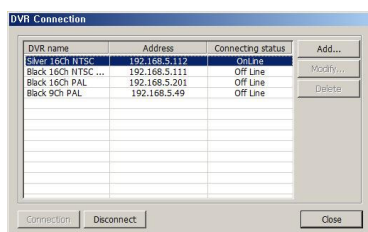


Add : Enter IP address and user authentication to connect DVR

Modify : Modify IP address and user authentication of the existing list

Delete : Delete existing use.

<DVR Connection Window>

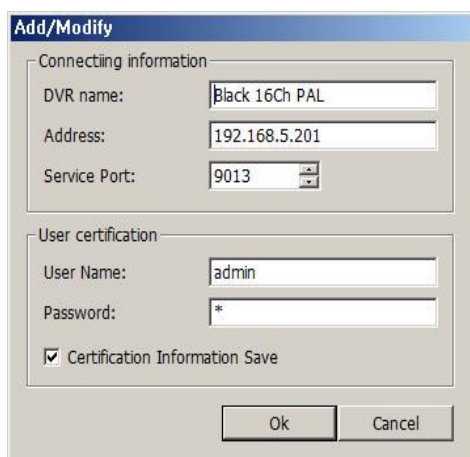

DVR name :

Specify a name that you can easily identify.

Address :

Specify assigned IP address to connect DVR (Type the Host name of REAL IP or DDNS.)

<New Connection/Modify Dialogue Window>

<What is IP address?>

A set of address system that is used to find out destination in network access via Internet or LAN.

IP address is divided into REAL IP and VIRTUAL IP, and REAL IP must be sent on DVR for the access from remote site via internet. You can be assigned with REAL IP Or DDNS service ID (Hostname of Dynamic Domain Name Server).

Service Port :Set this the same as the service port assigned to DVR.

<What is service port?>

Function to make the virtual IP available to the devices such PC or DVR with Automatic connection to the specified service port when remote access is made To router via the router or IP Share of one REAL IP. (But this function is available Only when router or IP Share supports it.)

User Name : Type the user name authorized in DVR

Password : Type the password authorized in DVR

Save Authentication Information :Save Authentication Information

2 Program Information and Set up




Program Information :
Shows Remote Program's
information.



Program Setup :
Sets up Remote Program.
(Language, Display Output, Resolution, Save Path, Network
Speed Etc)



<Program Information Window>

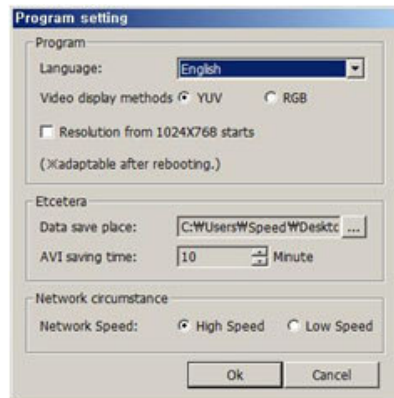

<Program Setup Window>

Language :

To choose program's language.

Video Display :

YUV mode : According to your PC graphic card ability, the support can be decided. This mode shows faster, clear ability of image transmission than RGB mode.

RGB mode : It is widely compatible with most graphic cards, and select this when YUV mode is not supported..

Resolution from 1024X768 starts :

It always shows 1024 x768 when you check..

※ Above setting value will apply after restart of the program.

<Recommended Graphic Card>

ATI series : Radeon7000series (More then 32M), RADEON series...

NVIDIA series : M64series(More then 32M), GEFORCE series...

Etc : VGA card to support YUV mode YUV...

Data Save Place :Sets up basic path of AVI file to save.

AVI Saving time : Sets up saving time of AVI file from remote.

Network Speed :

High Speed : System sends off images at high speed possible.

Low Speed : System sends off images at normal speed in consideration of stability.

3 Status Icon



Status icon of connected DVR

Recording status

CH	Resolution	Frame	Picture Qu...	Sound
01	-	-	-	-
02	360X240	5fps	Normal	Not use
03	720X240	1fps	Normal	Not use
04	360X240	1fps	High	Not use
05	-	-	-	-
06	360X240	5fps	High	Not use
07	720X240	1fps	Normal	Not use
08	-	-	-	-
09	-	-	-	-
10	-	-	-	-
11	360X240	5fps	High	Not use
12	720X480	30fps	Highest	Not use
13	-	-	-	-
14	720X480	1fps	Normal	Not use
15	720X480	1fps	Normal	Not use
16	720X480	1fps	Normal	Not use

Close

<Recording Status>

Shows and check the recording status

Event status

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Motion	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖
Sensor	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖
No video signal	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖	✖

Alarm control... Close

<Event Status>

Shows DVR's event status and you can check the status of Motion, Sensor, Video Loss at real time.

Alarm control

Alarm1	<input type="checkbox"/> ON	<input type="checkbox"/> OFF
Alarm2	<input type="checkbox"/> ON	<input type="checkbox"/> OFF
Alarm3	<input type="checkbox"/> ON	<input type="checkbox"/> OFF
Alarm4	<input type="checkbox"/> ON	<input type="checkbox"/> OFF

Close

<Alarm Control>

You can On/Off the DVR's alarm if you press the Alarm control button.

HDD Status

Type	Capacity	Used	Temperatur	SMART
HDD1	111GB	99%	37°C	Good
HDD2	279GB	92%	40°C	Good
HDD3	279GB	01%	39°C	Good
HDD4	-	-	-	No support

Close

<HDD Status>

Shows the connected DVR HDD status.

You can check temperature and status at real time.

4 REMOTE SEARCH Execution and Set Up




REMOTE SEARCH Execution

Set Up Execution

Pressing each button operates REMOTE SEARCH or Set Up.


REMOTE (LIVE) and REMOTE SEARCH are made up in separate program.

Remote Set Up <Camera>

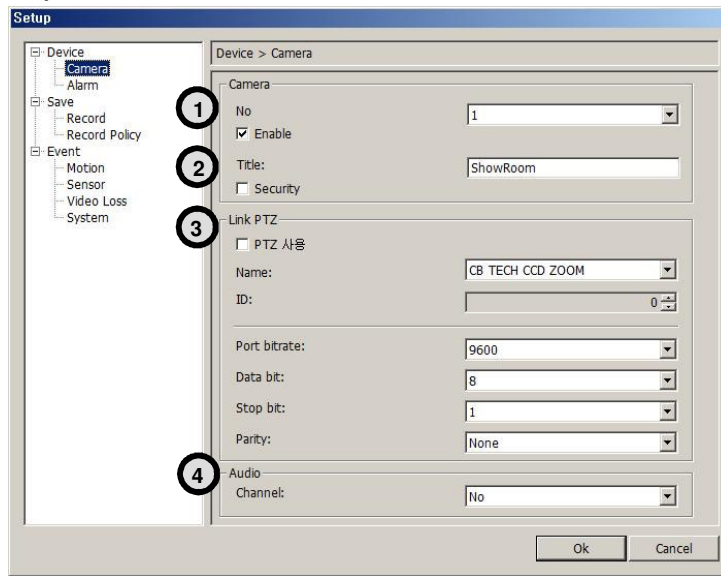

- ① No : Item to select camera No
To set up all the camera equally, Choose "select all"
- ☒ Enable : Selection item to use camera, Removing the check stops using that channel.
- ② Title : Item to revise/type the camera name.
☒ Security : When checked, It displays 'Hidden' on monitor. (though it keeps recording)
- ③ Link PTZ : Sets up PTZ camera.
☒ PTZ address: Item to assign PAN TILT address per camera.
Name :Item to check PTZ Camera's model name.
ID : Item to select PTZ address per camera.
- Port bit rate : Item to select the PTZ's port bit rate.
Data bit :Item to select data bit.
Stop bit : Item to select Stop bit.
Parity : Item to select Parity.
- ④ Audio : Item to select which audio channel to be used among total 4 audio inputs.

Remote Setup <Alarm>

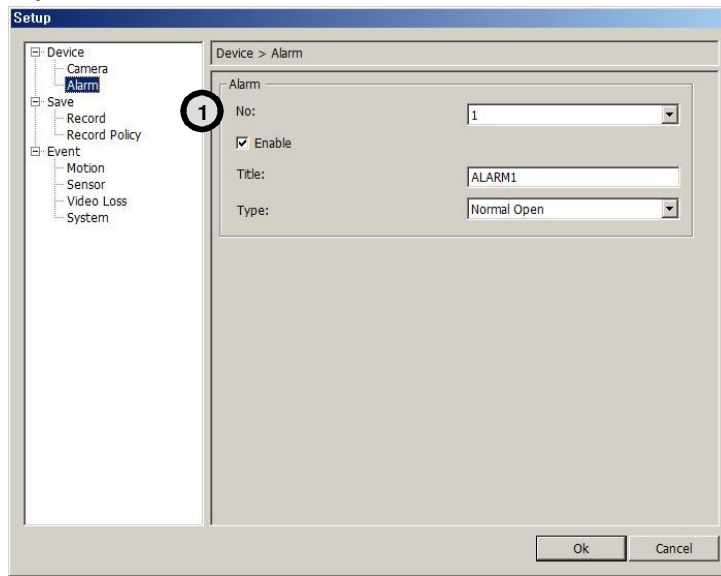

- ① No : Item to select Alarm No.
To set up all the camera equally, Choose "select all"

☒ Enable : Item to select to use Alarm, Removing the check stops using that channel.


Title : Item to type Alarm's name.

Type : Item to select Alarm's type.

- Normal Open : Type of alarm open in general situation.

- Normal Close : Type of alarm close in general situation.

Remote Set Up <Record>

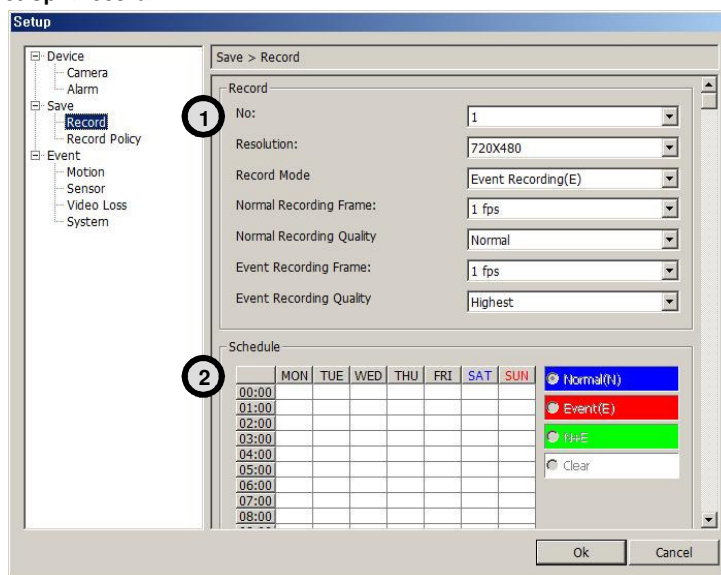

- ① No : Item to select Camera No.
To set up all the camera equally, Choose “select all”

Resolution : Item to change the resolution.

- NTSC : 720X480, 720X240, 360X240
- PAL : 720X576, 720X288, 360X288

Normal Record Frame :Item to select normal record frame.

Normal Record Quality : Item to select normal record quality.


Event Record Frame :Item to select Event (Motion + Sensor + Video Loss) record speed.

Event Record Quality : Item to select Event (Motion + Sensor + Video Loss) record quality.

Schedule : Item to select record schedule.

- Normal : Always Record
- Event : Motion, Sensor, Video Loss
- N + E : Always + Event Record
- Clear : Delete the current record schedule.

② Remote Set Up <Record (Timetable)>

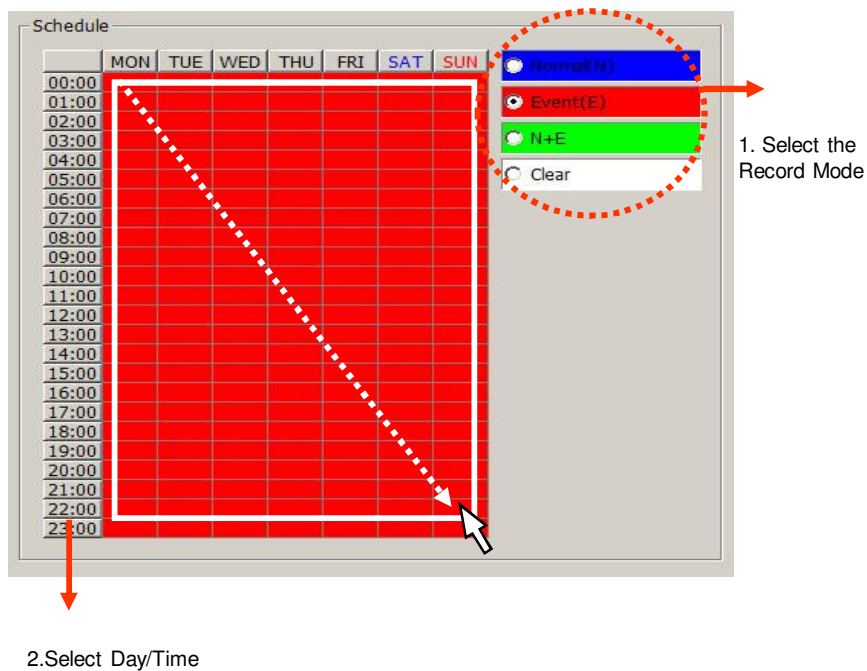

Schedule Indication by color

Normal(N) : (Blue)

Event(E) : (Red)

Normal(N) + Event(E) : (Green)

Clear (No Record) : (White)

< Schedule of Record >


It is the list of selection in which schedule to use in operating the relevant camera channel.

First select the item you need among Normal time, Event and Normal time + Event.

Then drag mouse from the wanted position on time line.

※ To edit schedule record, you need to set record as schedule mode.


Remote Set Up <Record Policy>

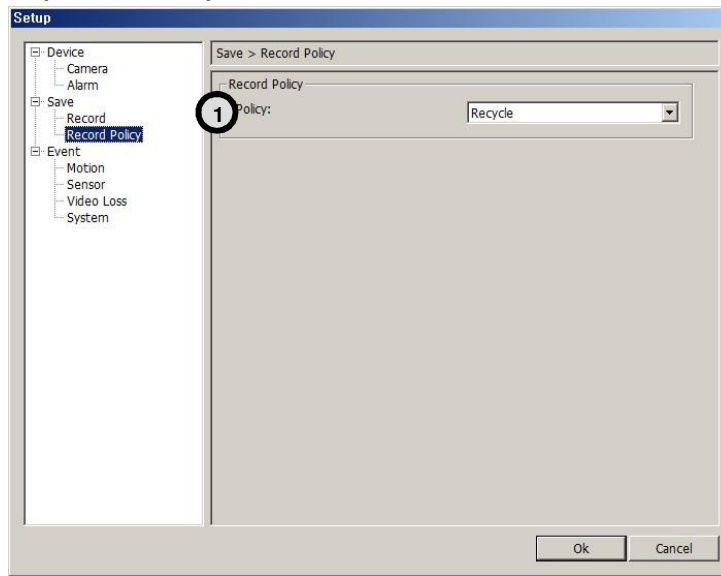

- ① Record Policy: Item to select record policy

Overwrite : When HDD capacity is almost consumed, It erases old data and record new.
Single Record : To stop recording on 100% of HDD capacity.

Remote Set Up <Motion>

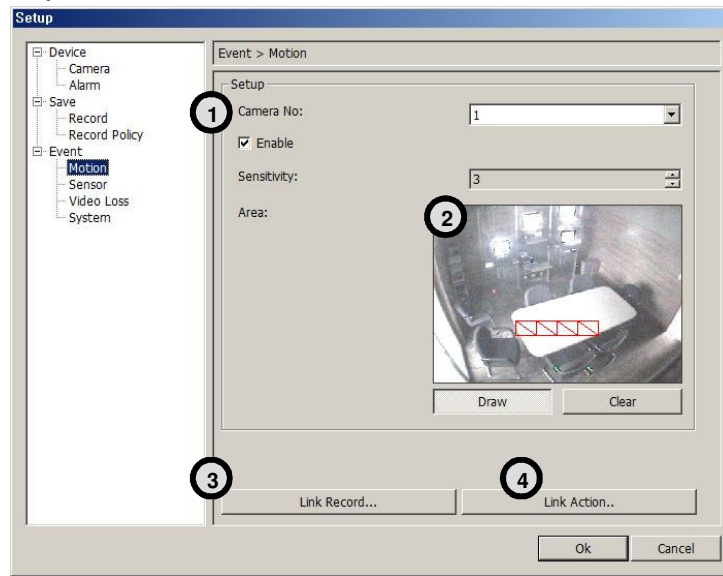

- ① **Camera No** : Item to select Camera No.
To set up all the camera equally, Choose “select all”

☒ **Enable** : Selects to use motion sensor, Removing the check stops using that channel.

Sensitivity : Adjusts the sensitivity in motion detection.
There are 5 steps and as the number increase, it gets more sensitive.

- ② **Area** : Item to select motion area.



Area is selected when drag the mouse on the image.

<Set Up Area Tool>



↓
**Area Draw
button**

↓
**Area Clear
Button**

③ Remote Set Up <Motion (Link Record)>

Link Camera :
Selects which channel to record when motion is detected on the relevant channel.

✳ Multiple selection possible

Pre Record : Sets pre-event recording time. (Max 5 second)
Post Record : Sets post-event recording time. (Max 60 second)

④ Remote Set Up <Motion (Link Action)>

Popup Camera :
Selects which channel to Popup when motion is detected on the relevant channel.

✳ It works when the Popup setting is 'Yes' on DVR.

Popup Time :
Sets Popup time

Link Alarm :
Select Alarm to be linked when motion is detected.


✳ Multiple selection possible

Alarm Time : Sets Alarm output time. (Max 30 second)
Buzzer Time : Sets buzzer output time in DVR. (Max 30 second)

- ☒ Mail : When motion is detected, the log is sent to the selected e-mail.
- ☒ Call Back : When motion is detected, the log is sent to the selected IP address.
- ☒ Log : Item to save Log writing when motion detected.
(It is not recorded on the system Log but used for event search.)

Motion detection function is a mode to detect in accordance with the amount of color changes of image. So, please be careful that DVR keeps recording as continuous motion when the image of camera is blinking caused by light problem or camera Auto Iris problem.

Remote Set Up <Sensor>

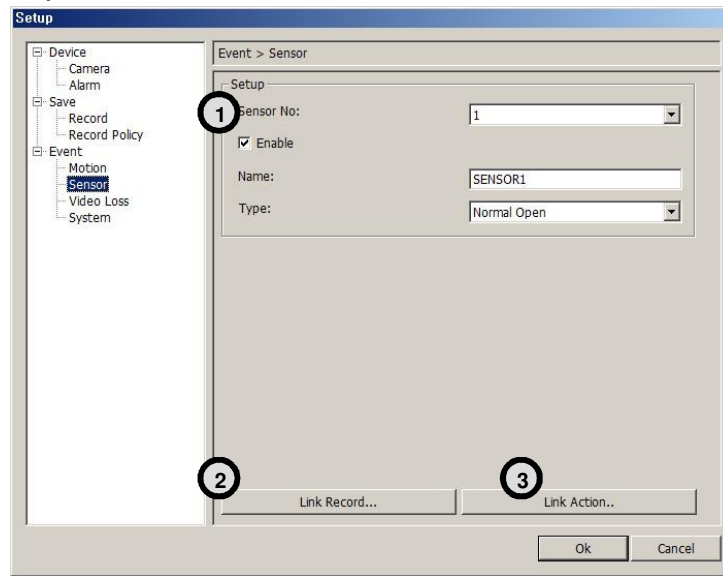

- ① **Sensor No** : Sets sensor No.
To set up all the camera equally, Choose "select all"
- ☒ **Enable** : Selects to use sensor, Removing the check stop using relevant sensor.

Title : Item to select sensor's name.

Type : Item to select sensor type.

- Normal Open : Type of Alarm open in general situation.

- Normal Close : Type of Alarm close in general situation.

② Remote Set Up <Sensor (Link Record)>

Link Camera :
Selects which channel to record when sensor is detected on the relevant channel.

✳ **Multiple selection possible**

Pre Record : Sets up pre recording time. (Max 5 second)
Post Record : Sets up post recording time. (Max 60 second)

③ Remote Set Up <Sensor (Link Action)>

Popup Camera :
Selects which channel to Popup when sensor is detected on the relevant channel.

✳ **It works when the Popup setting is 'Yes' on DVR.**

Popup Time :
Selects Popup time.


Link Alarm :
Selects Alarm to be linked when sensor is detected.

✳ **Multiple selection possible**

Alarm Time : Selects Alarm output time. (Max 30 second)
Buzzer Time : Selects buzzer output time. (Max 30 second)

- ☒ **Mail :** When sensor is detected, the log is sent to the selected e-mail.
- ☒ **Call Back :** When sensor is detected, the log is sent to the selected IP address
- ☒ **Log :** Item to save Log writing when sensor detected
(It is not recorded on the system Log but used for event search.)

Remote Set Up <Video Loss>

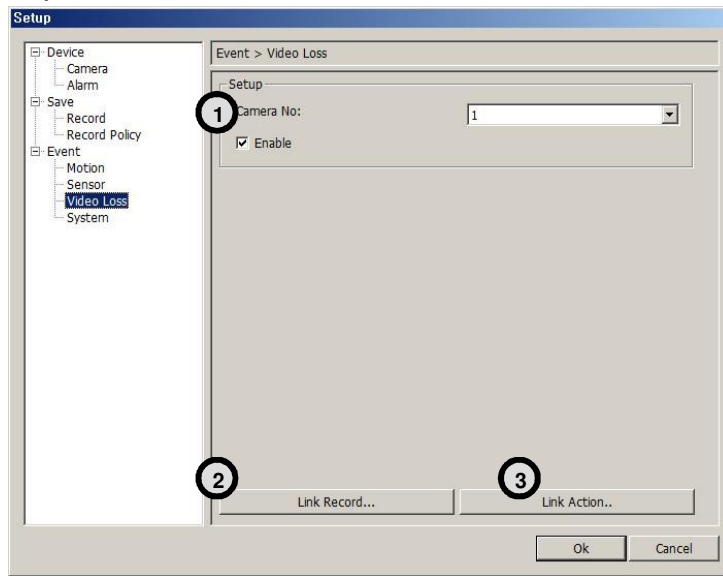

- ① **Camera No** : Item to select camera No.
To set up all the camera equally, Choose “select all”

☒ **Enable** : Selects to use Video Loss.

② Remote Set Up <Video Loss(Link Record)>

Link Camera :
Selects which channel to record when video loss is detected on the relevant channel.

✳ Multiple selection possible

Pre Record : Sets up pre recording time. (Max 5 second)

Post Record : Sets up post recording time. (Max 60 second)

③ Remote Set Up <Video Loss (Link Action)>

Popup Camera :
Selects which channel to Popup when video loss is detected on the relevant channel.

✳ It works when the Popup setting is 'Yes' on DVR.

Popup Time :
Selects Popup time.

Link Alarm :
Selects Alarm to be linked when video loss.

✳ Multiple selection possible

Alarm Time : Selects Alarm output time (Max 30 second)


Buzzer Time :Selects buzzer output time (Max 60 second)

☒ Mail : When video loss occurred, the log is sent to the selected e-mail

☒ Call Back : When video loss occurred, the log is sent to the selected IP address.

☒ Log : Item to save Log writing when video loss occurred.
(It is not recorded on the system Log but used for event search.)


Remote Set Up <System>

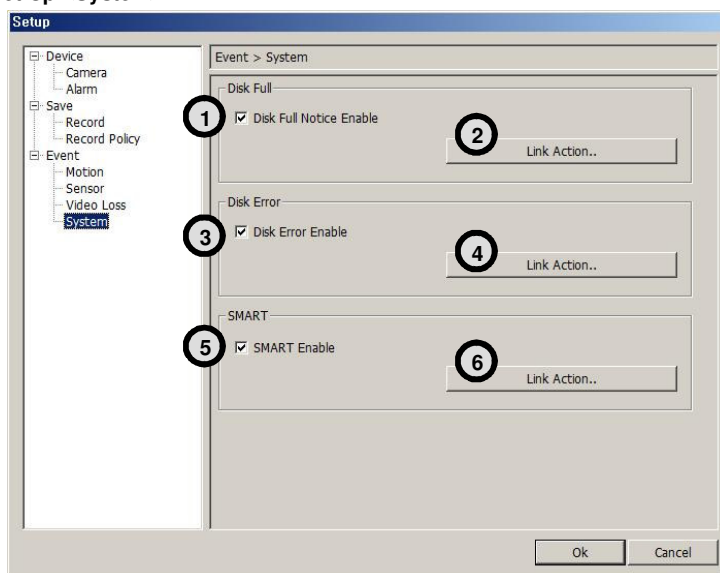

- ① **DISK FULL** : List for all installed HDD disks.

☒ Disk Full Notice Enable : Activate Disk Full Notice when installed disks are full.

- ② **Remote Set Up <Disk Full (Link Action)>**

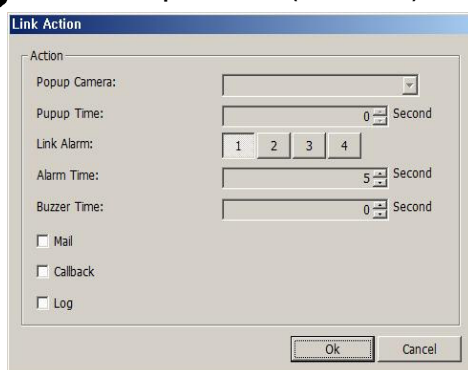

Popup Camera :
Not available as of now

Popup Time :
Not available as of now

Link Alarm :
Selects which Alarm to be linked when all
installed HDD disks are full.

✳ Multiple selection possible

Alarm Time : Selects Alarm output time. (Max 30 second)

Buzzer Time : Selects buzzer output time (Max 30 second)

- ☒ Mail : When all installed HDD disks are full, the log is sent to the selected e-mail
 - ☒ Call Back : When HDDs are full, the log is sent to the selected IP address.
 - ☒ Log : Selects to save Log writing when installed HDDs are full.
(It is not recorded on the system Log, but used for event search.)
- ③ **Disk Error** : Shows data error on all of the HDDs installed. (Additional function soon)
- ☒ Enable Disk Error : When there is a disk error, it is linked to action.

④ **Remote Set Up <Disk Error (Disk Action)>**

Popup Camera :
Not available at this moment

Popup Time :
Not available at this moment

Link Alarm :
Selects Alarm to be linked when HDD error.

✳ Multiple selection possible

Alarm Time : Sets Alarm output time (Max 30 second)
Buzzer Time : Sets buzzer output time (Max 30 second)


- ☒ Mail : When HDD error occurs, the log is sent to the selected e-mail
- ☒ Call Back : When HDD error occurs, the log is sent to the selected IP address.
- ☒ Log : Selects to save Log writing when HDD error.
(It is not recorded on the system Log but used for event search.)

⑤ **SMART**

- ☒ Enable SMART : Select to use SMART feature.

SMART Function??

It checks the physical errors and observes the HDD disk continuously such as Temperature, I/O device errors and general conditions of the HDD disk.

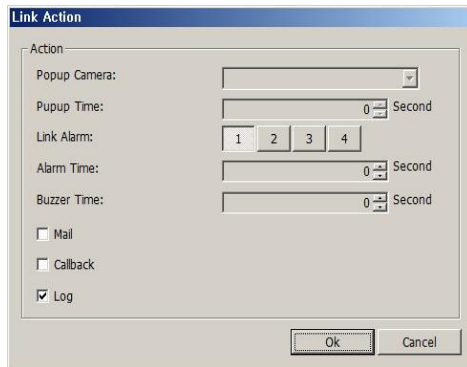⑥ Remote Set Up <SMART (Link Action)>

Popup Camera :
Not available at this moment

Popup Time :
Not available at this moment

Link Alarm :
Selects which alarm to be linked

*** Multiple selection possible**

Alarm Time : Sets Alarm output time (Max 30 second)
Buzzer Time : Sets Buzzer output time (Max 30 second)

- ☒ Mail : When smart related problem occurs, the log is sent to the selected e-mail.
- ☒ Call Back : When problem occurs, the log is sent to the selected IP address.
- ☒ Log : Selects to save Log writing when smart related problem occurs
(It is not recorded on the system Log but used for event search.)

5 PLAY & PAUSE

Starts or stops image transmission on the Remote Live screen.
This starts automatically when search or set in the setup menu.



Starts to play when pressed.



Stops to play when pressed.

6 AUDIO Transmission

Controls Audio volume. **※Audio signal is sent on full screen mode only.**




Mute Button :
Stops audio transmission.

Sound volume control gauge

7 Right Mouse Click Action

When the right button is clicked on Remote Live, the following menu below appears and the following functions can be used.

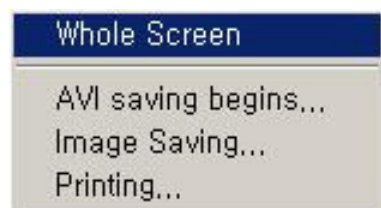

Whole Screen : Hides the function button and shows the image full screen.

AVI Saving Begins :
Starts AVI saving of the channel Selected.

※Audio signal is saved on full screen mode only.

Image Saving.. : Save image file of channel selected (Save JPEG or BMP)
Printing.. : Print current image of the channel.

8 Channel Button

Moves to the channel selected and it has the same function as double click the left mouse button on the selected channel.

**9 Layout Modify Button**

Screen Division Button : Selects desirable screen division.

Whole Screen : All buttons are hidden and the screen displays full.



※ Left double click of mouse returns to the previous screen from whole screen.

10 PTZ Operation



A camera supporting PTZ can be used on Remote Viewer program.
 ※ Refer to PTZ support list

Direction Button :
 Button to move top, bottom, left, right

Channel Indication :
 Indicate current channel


Speed Control Button :
 Button to control moving speed

Image Control Button :
 Button to adjust Zoom, Focus, Iris


Pre set move button

Pre set save button

Preset Move: Move to saved preset No.
 Preset Save : Save preset No.




<Preset Move>



<Preset Save>

Remote Search

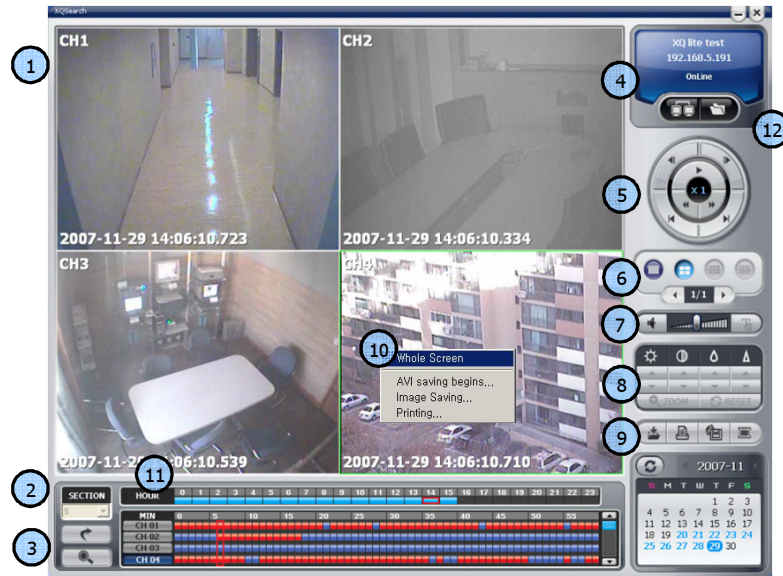

1 Playback Display

Camera Name →




Green Border Line :
Display the selected
camera.

Recorded
Date/Time →

2007-08-01 09:17:18.450

2 SECTION



Selects section

Section is created when Date/Time is changed to former times.
Former Date/Time will be kept in section 0.
Newly set Date/Time will be kept in section 1.....

3 Move & Event Search



→ **Move Button** : Move to selected time

→ **Event Search Button** : Popup the event search window

Shows start and end time of recorded data.

Moves to the time to search and press OK button.

<Move Window>

Select the time to event search

Select events in detail.

Select the camera to search.

Start event search. Click below Import button to list events.

Shows current searched event lists.

Hotkey : Play the searched event.
Click Stop button first and select a certain event list and click Hotkey to play the event.

Import : Search the next event list.

*** 10 lists are shown every time clicks import button**

<Event Search Window>

Please make sure to select "WRITE LOG" of the system.
If not, event lists aren't searched.


4 Connection Information and Button



Shows DVR's name, IP address and connection status.

Backup play button

Connect/Disconnect Button :
Button to connect to other DVR in the saved list

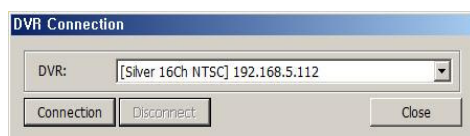

<Connection List Window>

When many DVRs are registered in the DVR list, each DVR can be remotely searched without closing The Remote Program.

The linked list s can't be edited while search.

5 Playback Button

Previous Frame :
Play previous frames
reverse direction

Play / Pause

Next Frame :
Play next frames
forward direction


Starting :
Move to starting
of record data

End :
Move to end of record data

Fast Rewind : Fast reverse
play every 1 minute

Fast Forward :
Fast play every 1 minute

Speed Control Bar



6 Screen Division Button



Screen Division Button

7 AUDIO Play

Controls audio volume. ✖Audio signal is sent only on one full screen.




Sound volume control gauge



Mute Button :
Stops audio transmission

8 Image Control Button

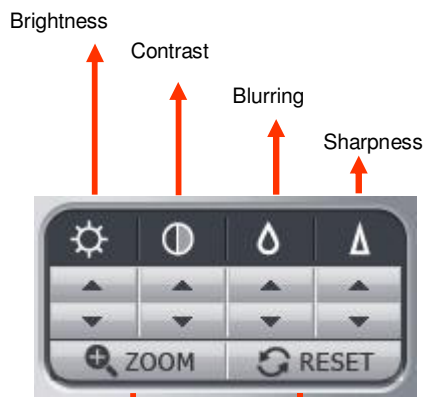

Brightness adjustment button :
Adjusts the brightness of playing images.

Contrast adjustment button :
Adjust the contrast of playing images.


Blurring adjustment button:
Adjusts the blurring of playing images.

Sharpness adjustment button:
Adjust the sharpness of playing images.

Zoom Button :
Zoom the selected part

Reset button :
Initializes the adjusted image to original image.

9 Saving Button

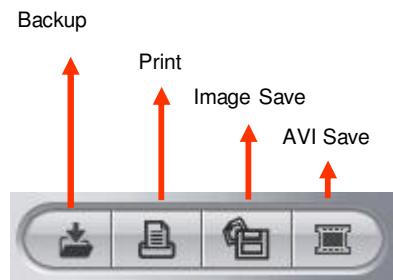

Back Up :

Backup the searched image as compressed image file.

Print :


Print the searched images.

Image Save :

Saves the searched images as Image File. (Save JPEG or BMP)

AVI Save :

Saves the searched images as AVI file.

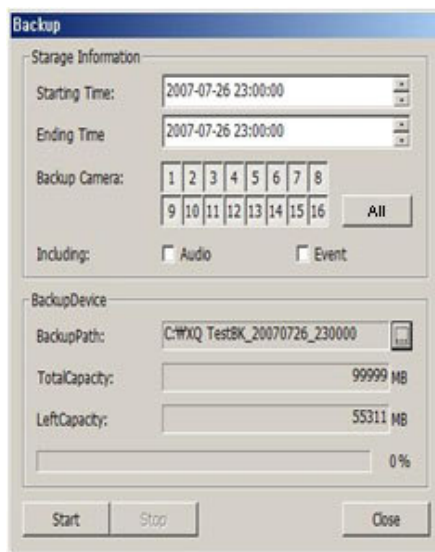

Storage Information :

Select start and end time to backup image.

Backup Camera :

Select the camera to backup

Including :

Selects audio and event to include.

Backup Path :

Selects the path to backup

Total Capacity :

Shows total capacity


Used Capacity :

Shows used capacity


Left Capacity :

Shows remaining capacity

<Backup Window>

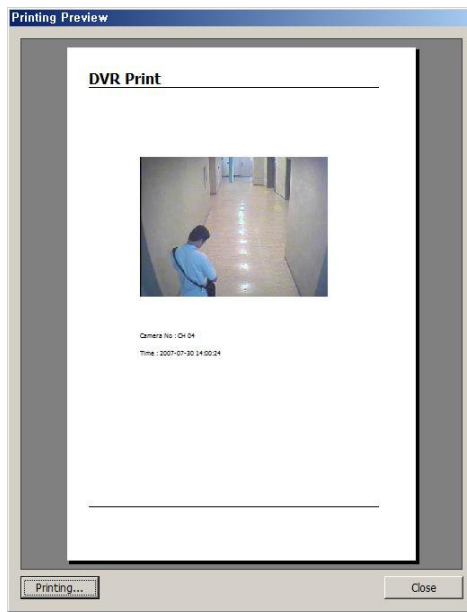

<Preview Window>

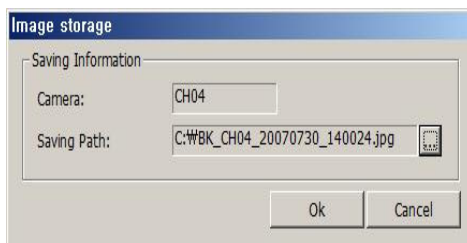

<Image Save Window>

Preview :

Preview of the images to print, which is printed with various information written on the bottom of the image.

Image Format**JPG format :**


Definition has a little loss due to loss compression method, but archiving size is small.

BMP format :

Archiving size is a bit big due to no compression, but it can be saved as higher definition than JPG.

Saving Path :

Selects the path to backup.

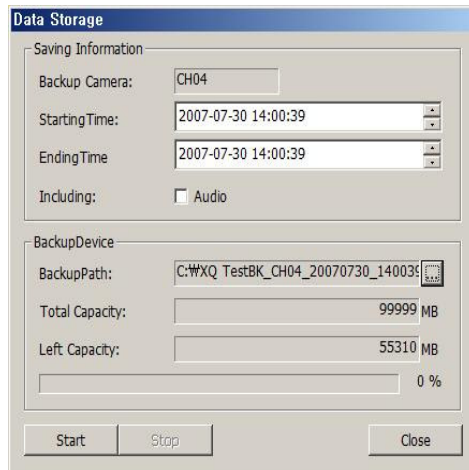

<AVI Save Window>

Storage Information

Selects camera No and start/end time to save.

Including :

Selects audio to include.

Back Up Patch :

Selects the path to backup

Total Capacity :

Shows total capacity


Left Capacity :

Shows remaining capacity

Check "Caption option" of Media Player to display time/date of playing AVI file.

10 Right Mouse Click Action

When the right button is clicked, the following menu below appears and the following functions can be used

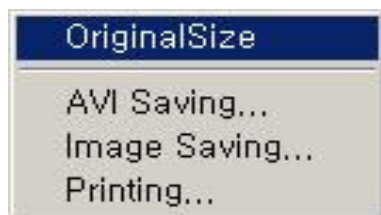

Original Size : Shows original size.

AVI Saving :
Starts to save AVI file


※ Audio signal is save only on full screen.

Image Saving.. : Save image of the selected camera (Save JPEG or BMP)

Printing.. : Print current image of the camera

11 Time Table

Selects year/month/day and hour/minute to search the recorded data.

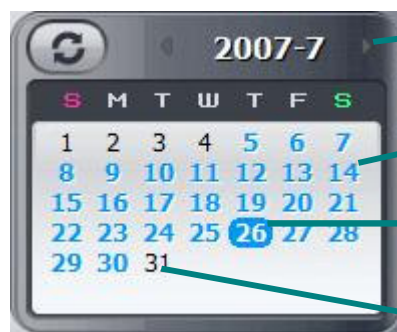

Year/Month Select Button :

Button to move previous and next month.

Recorded Date (Blue) :

Shows recorded date in blue.


Current Date (Blue Round) :

Shows current date in blue round.

No Recorded Date (Black) :

Shows no recorded data in black.

Timeline Display : Displays in 24 hours system and one each line is 1 hour unit.

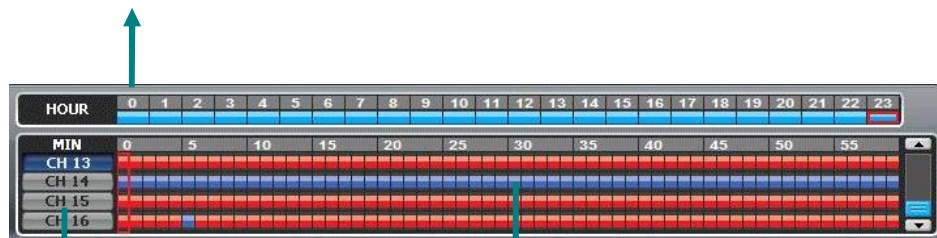


Camera Selection Button :
Select the camera.

Minute selection Pointer::
Select the minute.

12 Backup Playback

Backup Playback Button :
Click to backup playback

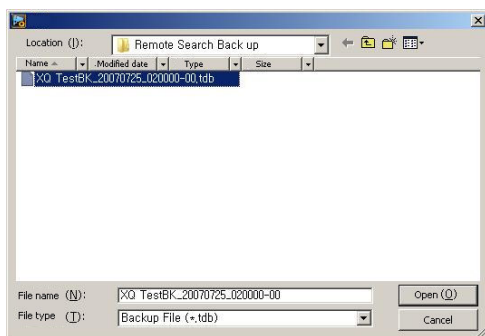

Select the backup data to play.

Backup playback can play a data of Image file.

Windows Media Player can play a data of AVI image files .


PLAYER




① Search screen




② Starting/End

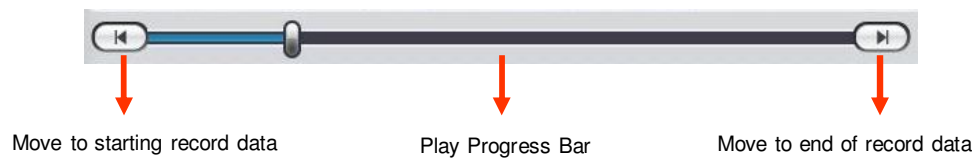


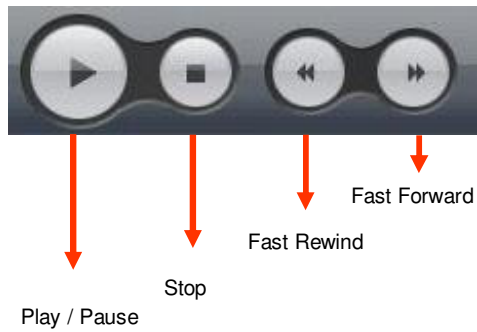3 Play button**4 Sound volume Control Button**

※Audio signal is sent only on one full screen.

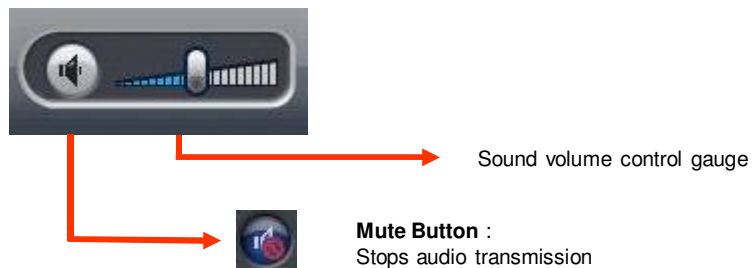**5 Layout Button**

Layout button : Button to select screen division mode .


6 Call function/Program Info

Information :
Shows program
information.



<Program Info Window>

Call Function Button :
Button to call in the back up file.

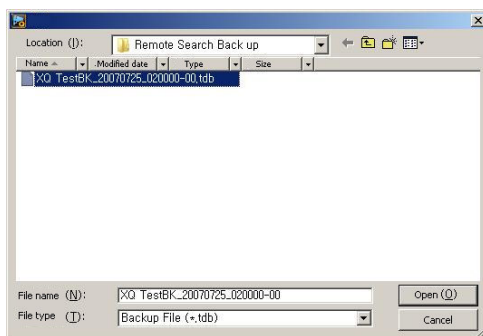


Select the backup data to play

**Backup playback can play a data
of Image file.**

**Windows Media Player can play
a data of AVI image files .**

Chapter-VII. APPENDIX

Front Key Explain

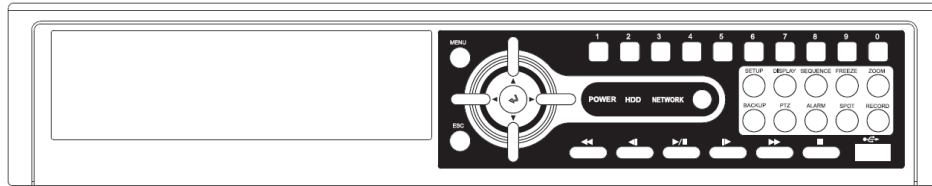

ITEM	DETAIL	REMARK
ESC	- Exit menu/mode - Return to search mode during playback	
ENTER	- Select each menu - Confirm input setup value - The Same function as mouse left click	
SETUP	- Enter into Setup menu	
BACKUP	- Backup menu in search mode - Prompt backup in playback mode	
MENU	- Menu setup - The same as mouse right click	
PTZ	- Enter into PTZ control mode	
ALARM	- Enter into Alarm control mode	
SPOT	- Spot monitor control	
RECORD	- Panic Record On/Off	
DISPLAY	- Display screen division mode	
SEQUENCE	- Start/end sequence display mode	
FREEZE	- Pause screen display	
ZOOM	- Zoom In/Out screen display	
BACK STEP	- Reverse step playback	CALENDAR SEARCH
PLAY/PAUSE	- Play/pause	LATEST SEARCH
STEP	- Step playback	EVENT SEARCH
REW	- Rewind	FIRST SEARCH
FF	- Fast forward	LAST SEARCH
0 ~ 9	- 0 ~ 9	

Hot Key to control the playback and display output on search display

ITEM	DETAIL	REMARK
BACK STEP	- Enter to calender search mode	- Enter from search mode
PALY/PAUSE	- Move to ending playback	- Enter from search mode
STEP	- Enter to event search mode	- Enter from search mode
REW	- Starting to Playback data	- Enter from search mode
FF	- End to Playback data	- Enter from search mode

Product Warranty

Product Name			Model		
Serial NO.			Date of purchase		
Dealer		Address		Address	
Customer name		Address		Address	

Warranty period – 1 year

As warranty period is counted from the date of purchase, it is recommended that you get the date of purchase to be written.

(If you are not sure about the date of purchase, the warranty period is counted from the date when six months are passed from the date of manufacture.)

Free Service

We will recompense in accordance with free service or Consumer Damage Compensation, Ministry of Finance and Economy's Notification, in case there is any failure of performance or function, which occurred naturally under normal use of product within one year (warranty period) after purchasing the product.

Pay service

1. In case of failure due to consumer's mistake
 - in failure due to the careless handling, repair or conversion of the consumer
 - in failure due to the repair by unqualified person instead of dealer or service center engineer
 - in failure or damage due to falling or such things during relocating after installing
 - in failure due to abnormality of used power or inferiority of the networks and apparatus that is attached to this product
2. In case of other reasons such as disasters (fire, salt damage, flood, landslide, etc....)